




Heyco® Snap Bushings

Mounting Diameter: 0.812”-6.000”



Consult Heyco for Colors Other Than Black or White

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter		Black	White		A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.125	3,2	.812	20,6	2100	2101	SB 812-9	.562	14,3	.890	22,6	.406	10,3
.125	3,2	.812	20,6	2103	2104	SB 812-10	.625	15,9	.890	22,6	.406	10,3
.125	3,2	.875	22,2	2110	2111	SB 875-6	.375	9,5	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2113	2114	SB 875-7	.437	11,1	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2116	2117	SB 875-8	.500	12,7	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2120	2121	SB 875-9	.562	14,3	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2123	2124	SB 875-10	.625	15,9	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2126	2127	SB 875-11	.687	17,5	.953	24,2	.453	11,5
.125	3,2	1.000	25,4	2140	2141	SB 1000-12	.766	19,4	1.125	28,6	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2160	2161	SB 1093-13	.812	20,6	1.218	30,9	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2163	2164	SB 1093-14	.875	22,2	1.218	30,9	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2166	2167	SB 1093-15	.937	23,8	1.218	30,9	.453	11,5
.125	3,2	1.187	30,2	2182	2183	SB 1187-15	.937	23,8	1.312	33,3	.453	11,5
.125	3,2	1.250	31,8	2198	2199	SB 1250-15	.937	23,8	1.359	34,5	.453	11,5
.125	3,2	1.250	31,8	2201	2202	SB 1250-16	1.000	25,4	1.310	33,2	.453	11,5
.125	3,2	1.375	34,9	2207	2208	SB 1375-14	.875	22,2	1.490	37,3	.453	11,5
.125	3,2	1.375	34,9	2210	2211	SB 1375-16	1.000	25,4	1.490	37,3	.453	11,5
.125	3,2	1.500	38,1	2233	2234	SB 1500-17	1.062	27,0	1.609	40,9	.453	11,5
.125	3,2	1.500	38,1	2236	2237	SB 1500-18	1.125	28,6	1.609	40,9	.453	11,5
.125	3,2	1.500	38,1	2240	2241	SB 1500-21	1.312	33,3	1.609	40,9	.453	11,5
.125	3,2	1.750	44,5	2300	2301	SB 1750-22	1.375	34,9	1.875	47,6	.453	11,5
.125	3,2	2.000	50,8	2400	2401	SB 2000-26	1.640	41,6	2.125	54,0	.453	11,5
.125	3,2	2.000	50,8	2406	—	SB 2000-28	1.750	44,5	2.125	54,0	.453	11,5
.250	6,4	2.093	53,1	2415	2416	SB 2.093-29	1.813	46,0	2.350	59,7	.720	18,3
.250	6,4	2.250	57,2	2417	2418	SB 2.25-29	1.860	47,1	2.480	63,1	.720	18,3
.250	6,4	2.500	63,5	2420	2421	SB 2.5-31	1.970	50,0	2.660	67,5	.720	18,3
.250	6,4	3.000	76,2	2461	2462	SB 3.0-39	2.470	62,7	3.160	80,2	.720	18,3
.250	6,4	3.375	85,7	2407	2408	SB 3375-45	2.812	71,4	3.660	92,9	.720	18,3
.250	6,4	3.500	88,9	2470	2471	SB 3.5-47	2.940	74,7	3.660	93,0	.720	18,3
.250	6,4	4.000	101,6	2479	2480	SB 4.0-55	3.480	88,4	4.170	105,9	.720	18,3
.250	6,4	5.000	127,0	2409	2410	SB 5.0-70	4.375	113,8	5.219	132,6	.740	18,8
.250	6,4	6.000	152,4	2484	2485	SB 6.0-86	5.375	139,2	6.219	157,9	.740	18,8

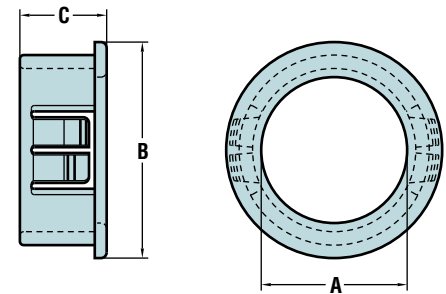

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities. Locking fingers in fractional increments up to the maximum panel thickness.

Material 6/6 “Nylon”
 Certifications Recognized under the Component Program of Underwriters’ Laboratories, File #E-15331
 Certified by Canadian Standards Association, File #LR-8919
 Flammability Rating 94V-2
 Material Temperature Index 125°C–Maximum temperature on part not to exceed 105°C

Quick Specs