



ALL NEW PRODUCTS!




Heyco® Thick Panel Universal Bushings

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness	Mounting Hole Diameter		Black			Max. Inside Diameter	A Head Diameter		B Overall Height		
in.	mm.	in.	mm.								
.250	6,4	.500	12,7	3001	UBT-500	.312	7,6	.600	15,2	.545	13,8
.250	6,4	.625	15,9	3118	UBT-625	.437	11,1	.718	18,3	.550	14,0
.250	6,4	.750	19,0	3119	UBT-750	.500	12,7	.844	21,4	.550	14,0
.250	6,4	.875	22,2	3120	UBT-875	.562	14,3	.937	23,8	.550	14,0
.250	6,4	1.000	25,4	3121	UBT-1000	.750	19,0	1.063	27,0	.550	14,0
.250	6,4	1.093	27,8	3002	UBT-1093	.812	20,6	1.156	29,4	.550	14,0
.250	6,4	1.375	34,9	3003	UBT-1375	1.000	25,4	1.490	37,8	.562	14,3
.250	6,4	1.500	38,1	3122	UBT-1500	1.062	26,9	1.610	40,9	.562	14,3

Standard Color: Black. Consult factory for color matching, prices, and minimum order quantities. Locking fingers in fractional increments up to the maximum panel thickness.

- Converts raw-edged holes to smooth, neat, insulated holes.
- Flexible "shutters" to absorb vibration on the inside diameter.
- Locking fingers "snap" into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in 8 sizes for use in 1/2" (12,7mm) to 1-1/2" (38,1mm) diameter holes.

Consult Heyco for Colors Other Than Black

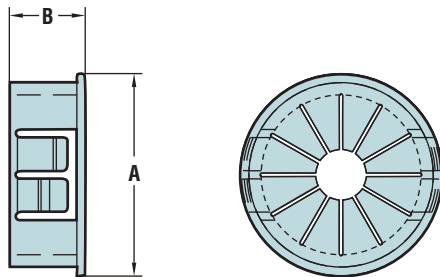

Material	6/6 "Nylon"
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File #E-15331 Certified by Canadian Standards Association, File #LR-8919
Flammability Rating	94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C

Quick Specs