




Heyco® Open/Closed Universal Bushings

- Split design allows side entry and encirclement of preassembled harnesses, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- Parts can be assembled into holes that already contain cables or tubing.
- Only fingertip pressure required to snap-lock the bushing into its mounting hole.
- Flexible "shutters" adjust to accommodate and support any shape from .125" to a maximum diameter of 1.062".
- Absorbs vibration, cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Available in 9 sizes for use in 1/2" (12,7mm) to 1-1/2" (38,1mm) diameter holes.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter				Black	Max. Inside Diameter		A Head Diameter		B Overall Height
in.	mm.	in.	mm.								
.125	3,2	.500	12,7	2055SP	OCUB-500	.312	7,6	.562	14,3	.385	9,8
.125	3,2	.625	15,9	2077SP	OCUB-625	.437	11,1	.718	18,2	.406	10,3
.125	3,2	.750	19,0	2089SP	OCUB-750	.500	12,7	.812	20,6	.406	10,3
.125	3,2	.875	22,2	2119SP	OCUB-875	.562	14,3	.921	23,4	.406	10,3
.125	3,2	1.000	25,4	2137SP	OCUB-1000	.750	19,0	1.062	27,0	.406	10,3
.125	3,2	1.093	27,8	2157SP	OCUB-1093	.812	20,6	1.187	30,2	.406	10,3
.125	3,2	1.250	31,8	2196SP	OCUB-1250	.937	23,8	1.468	37,3	.406	10,3
.125	3,2	1.375	34,9	2184SP	OCUB-1375	1.000	25,4	1.468	37,3	.406	10,3
.125	3,2	1.500	38,1	2213SP	OCUB-1500	1.062	26,9	1.578	40,1	.421	10,7

Standard Color: Black. Consult factory for color matching, prices, and minimum order quantities. Locking fingers in fractional increments up to the maximum panel thickness.

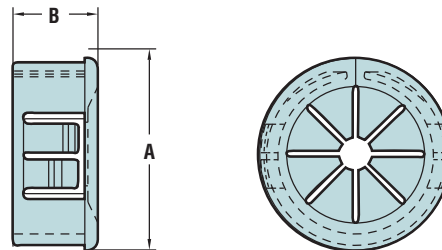

Quick Specs

Material	6/6 "Nylon"
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File #E-15331 Certified by the Canadian Standards Association, File #LR-8919
Flammability Rating	94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C