




Heyco® Thick Panel Snap Bushings

- Converts raw-edged holes to smooth, neat, insulated holes.
- Locking fingers “snap” into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in 10 sizes for use in 1/2” (12,7mm) to 2” (50,8mm) diameter holes.



PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter		Black	White		A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.									
.250	6,4	.500	12,7	3126	3127	SBT-500-6	.391	9,9	.578	14,7	.562	14,3
.250	6,4	.875	22,2	3104	3105	SBT-875-11	.687	17,5	.953	24,2	.562	14,3
.250	6,4	1.000	25,4	3108	3109	SBT-1.00-12	.766	19,4	1.125	28,6	.562	14,3
.250	6,4	1.093-1.125	27,8-28,6	3128	3129	SBT-1.093-15	.937	23,8	1.218	30,9	.562	14,3
.250	6,4	1.187	30,2	3130	3131	SBT-1.187-15	.937	23,8	1.312	33,3	.562	14,3
.250	6,4	1.250	31,8	3132	3133	SBT-1.250-16	1.000	25,4	1.310	33,2	.562	14,3
.250	6,4	1.375	34,9	3110	3111	SBT-1.375-16	1.000	25,4	1.500	38,1	.562	14,3
.250	6,4	1.500	38,1	3112	3113	SBT-1.500-21	1.312	33,3	1.620	41,2	.562	14,3
.250	6,4	1.750	44,5	3114	3115	SBT-1.750-22	1.375	34,9	1.875	47,6	.562	14,3
.250	6,4	2.000	50,8	3116	3117	SBT-2.00-26	1.625	41,3	2.125	54,0	.562	14,3

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities. Locking fingers in fractional increments up to the maximum panel thickness.

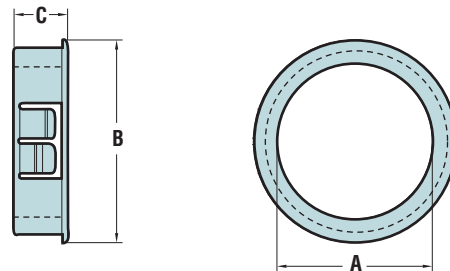

Quick Specs

Material	6/6 “Nylon”
Certifications	Recognized under the Component Program of Underwriters’ Laboratories, File #E-15331 Certified by Canadian Standards Association, File #LR-8919
Flammability Rating	UL 94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C