




Heyco® Shorty Plugs

- Limited protrusion (1/8" or 3,2mm) inside the panel.
- Eight sizes for use in “odd 32nd” diameter holes.
- Eight sizes for use in popular “even 32nd” diameter holes.
- Sixteen sizes total for mounting holes from 7/32" (5,5mm) to 1" (25,4mm).
- Locks firmly in panel up to 1/16" (1,6mm) thick.
- Quick and easy installation.

Consult Heyco for Colors Other Than Black or White

| PANEL DIMENSIONS | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|-------------------|-----|--|------|-------------|-------------|-------------|-----------------|------|------------------|-----|
| Maximum Thickness | | Mounting Hole Diameter | | Black | White | | A Head Diameter | | B Overall Height | |
| in. | mm. | in. | mm. | | | in. | mm. | in. | mm. | |
| .062 | 1,6 | .218 | 5,5 | 1654 | 1655 | SP-218 | .281 | 7,1 | .25 | 6,4 |
| .062 | 1,6 | .281 | 7,1 | 1660 | 1661 | SP-281 | .343 | 8,7 | .25 | 6,4 |
| .062 | 1,6 | .312 | 7,9 | 1678 | 1679 | SP-312 | .375 | 9,5 | .25 | 6,4 |
| .062 | 1,6 | .343 | 8,7 | 1663 | 1664 | SP-343 | .406 | 10,3 | .25 | 6,4 |
| .062 | 1,6 | .375 | 9,5 | 1681 | 1682 | SP-375 | .468 | 11,9 | .25 | 6,4 |
| .062 | 1,6 | .406 | 10,3 | 1666 | 1667 | SP-406 | .468 | 11,9 | .25 | 6,4 |
| .062 | 1,6 | .437 | 11,1 | 1684 | 1685 | SP-437 | .531 | 13,5 | .25 | 6,4 |
| .062 | 1,6 | .468 | 11,9 | 1669 | 1670 | SP-468 | .531 | 13,5 | .25 | 6,4 |
| .062 | 1,6 | .500 | 12,7 | 1687 | 1688 | SP-500 | .563 | 14,3 | .25 | 6,4 |
| .062 | 1,6 | .531 | 13,5 | 1672 | 1673 | SP-531 | .593 | 15,1 | .25 | 6,4 |
| .062 | 1,6 | .593 | 15,1 | 1675 | 1676 | SP-593 | .687 | 17,5 | .25 | 6,4 |
| .062 | 1,6 | .625 | 15,9 | 1690 | 1691 | SP-625 | .718 | 18,3 | .25 | 6,4 |
| .062 | 1,6 | .750 | 19,0 | 1693 | 1694 | SP-750 | .843 | 21,4 | .25 | 6,4 |
| .062 | 1,6 | .781 | 19,8 | 1696 | 1697 | SP-781 | .890 | 22,6 | .25 | 6,4 |
| .062 | 1,6 | .875 | 22,2 | 1699 | 1700 | SP-875 | .968 | 24,6 | .25 | 6,4 |
| .062 | 1,6 | 1.000 ^{+0,010} / _{-.000} | 25,4 | 1702 | 1703 | SP-1000 | 1.200 | 30,5 | .25 | 6,4 |

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.
Approximate Head Thickness: .063" (1,6mm).

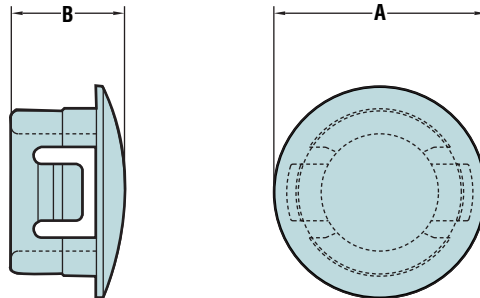

Quick Specs

Material: 6/6 “Nylon”
 Certifications: Recognized under the Component Program of Underwriters’ Laboratories File #E-15331
 Certified by the Canadian Standards Association File #LR-8919
 Flammability Rating: 94V-2
 Material Temperature Index: 125°C—Maximum temperature on part not to exceed 105°C