




Heyco® Insulation Plug

- Closes cavity-fill insulation holes in wood and other type siding.
- Convex, matte finish head blends with siding.
- Holds securely in hole.
- Quick and easy installation with fingertip pressure (no tool required).
- Molded of type 6/6 "Nylon".
Flammability classification 94V-2.
- Quick Specs below do not apply.

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
No Max.		1.000	25,4	3149	3150	IPW 1	1.234	31,3	.687	17,5

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.

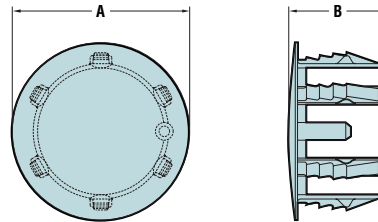


Heyco® Snub Bushings

- Provides insulation plus light strain relief.
- Suitable for 1/8" (3,2mm) to 1/4" (6,4mm) diameter cable, tubing or hose.
- The ID opens to accept the cable then closes firmly when installed into the mounting hole.

CHASSIS DIMENSIONS				APPROXIMATE CABLE DIAMETER ACCOMMODATED		PART NO.	DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter						Black		A Head Diameter	
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.
.125	3,2	.375	9,5	1/8	3,2	2034	K 375-125	.46	11,7	.42	10,7
.125	3,2	.437	11,1	3/16	4,8	2047	K 437-187	.47	11,9	.44	11,2
.125	3,2	.500	12,7	1/4	6,4	2057	K 500-250	.56	14,2	.44	11,2

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.

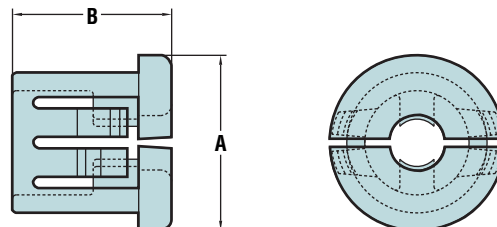

Quick Specs

Material Certifications

6/6 "Nylon"
 Recognized under the Component Program of Underwriters' Laboratories, File #E-15331
 Certified by Canadian Standards Association, File #LR-8919

Flammability Rating

94V-2

Material Temperature Index

125°C—Maximum temperature on part not to exceed 105°C