




Heyco® Threaded Insulating Bushings

TRADE SIZE NPT	PART NO. Black	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
			in.	mm.	in.	mm.	in.	mm.
1/8	2282	1B-1/8	.268	6,8	.530	13,4	.296	7,6
1/4	2284	1B-1/4 Phen.	.348	8,8	.715	18,2	.363	9,3
3/8	2286	1B-3/8 Phen.	.468	11,9	.875	22,2	.466	11,8

Standard Color: Black.

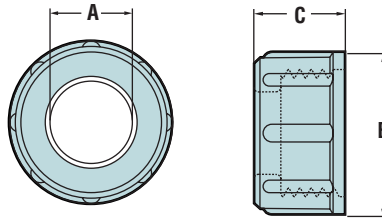


- Converts raw-edge pipe ends with NPT threads to smooth insulated ends.
- Insulates and mechanically protects lamp cords, other electrical and communications cables, tubing, hose, rope, and utility lines.
- 1/4" and 3/8" NPT sizes molded of phenolic material.
- 1/8" NPT size molded of type 6/6 "Nylon".
- Quick Specs below do not apply.



Heyco® Double Insulated Bushings

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter		Black	White		A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.062	1,6	.500	12,7	2514	2515	S50	.250	6,4	.562	14,3	.265	6,7
.062	1,6	.875	22,2	2540	2541	S87	.52	13,2	.98	24,9	.32	8,1
.125	3,2	.875	22,2	2552	2553	S875-562	.562	14,3	.98	24,9	.52	13,1

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.

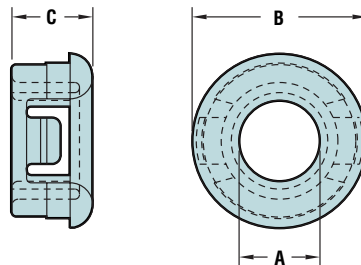

SINGLE PANEL THICKNESS



- Extra internal insulating sleeve covers the entire inside diameter, "blinding" the ID to openings around the locking fingers.
- Large radius exit hole.

Material
Certifications

6/6 "Nylon"
 Recognized under the Component Program of Underwriters' Laboratories File #E-15331
 Certified by the Canadian Standards Association File #LR-8919

Flammability Rating

94V-2

Material Temperature Index

125°C—Maximum temperature on part not to exceed 105°C

Quick
Specs