




Heyco® Armor Bushings


WILL FIT THESE ARMORED CABLES (AWG/CONDUCTORS)	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
	Red		in.	mm.	in.	mm.	in.	mm.
14/2, 14/3, 12/2, 12/3	2264*	AB-0	.37	9,4	.68	17,3	.58	14,7
14/4, 6/1, 4/1	2265*	AB-1	.44	11,2	.70	17,8	.63	16,0
12/4, 10/2, 10/3, 2/1	2266†	AB-2	.57	14,0	.85	21,6	.64	16,3
10/4, 8/2, 8/3, 1/1	2267†	AB-3	.73	18,5	1.02	25,9	.67	17,0

Standard Color: Red.

- Use with Flexible Armored Cable (BX) and Flexible Metallic Conduit (FMC), to insulate rough cut conduit ends.
- Suitable for installation at temperatures up to 90°C and as low as -40°C.
- Chamfered lead-in allows for fast installation.
- Size-marked for easy identification.
- Molded of high dielectric polyethylene.

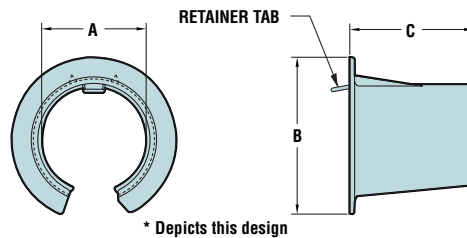

2264/2265

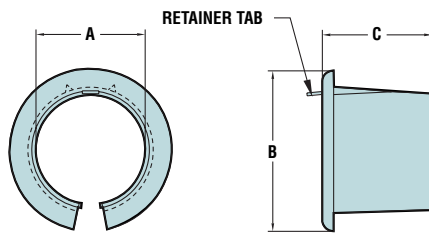

2266/2267

Material
Temperature Range

High Dielectric Polyethylene
-40°C to 90°C

Quick
Specs