




Heyco® Feet of Strength™

FSD—Feet with Drive Pin

Mounting Hole Size	PANEL DIMENSIONS Thickness Range				PART NO.	DESCRIPTION	PART DIMENSIONS						
	Minimum		Maximum				Black	A Overall Height		B Top Diameter		C Bottom Diameter	
	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.299	7,6	.031	0,8	.059	1,5	2543	FSD 3019-031	.197	5,0	.906	23,0	.984	25,0
.303	7,7	.197	5,0	.315	8,0	2544	FSD 3023-197	.236	6,0	.787	20,0	.827	21,0
.303	7,7	.031	0,8	.059	1,5	2545	FSD 3039-031	.394	10,0	.709	18,0	.787	20,0
.319	8,1	.031	0,8	.047	1,2	2547	FSD 3147-031	.472	12,0	.709	18,0	.787	20,0
.319	8,1	.031	0,8	.047	1,2	2549	FSD 3159-031	.591	15,0	.709	18,0	.787	20,0
.319	8,1	.031	0,8	.047	1,2	2551	FSD 3170-031	.709	18,0	.709	18,0	.787	20,0

Standard Color: Black.

- Molded of thermoplastic elastomer or polypropylene and elastomer blend for skid and vibration resistance.
- Two piece construction comes preassembled.
- To install, simply insert pin into the mounting hole, then press to secure.

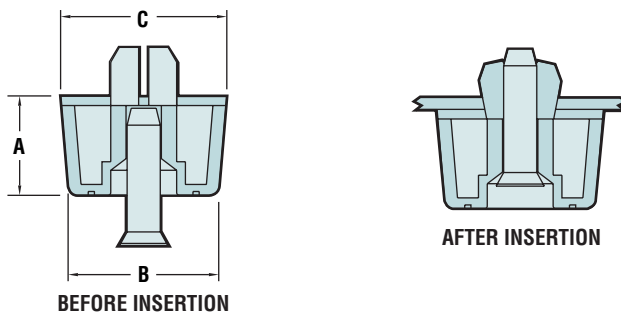

Heyco® Feet of Strength™

FSS—Feet with Slotted Screw Rivet

Mounting Hole Size	PANEL DIMENSIONS Thickness Range				PART NO.	DESCRIPTION	PART DIMENSIONS						
	Minimum		Maximum				Black	A Overall Height		B Top Diameter		C Bottom Diameter	
	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.197	5,0	.039	1,0	.091	2,3	2538	FSS 2055-039	.551	14,0	.787	20,0	.945	24,0
.197	5,0	.031	0,8	.079	2,0	2539	FSS 2059-031	.591	15,0	1.102	28,0	1.181	30,0

Standard Color: Black.

- An acetyl screw replaces the push rivet for fixing.
- Press screw to install; to release, use a conventional screwdriver.
- Molded from ethylene vinyl acetate.
- Installs with fingertip pressure.

