




Heyco® Polyurethane Adhesive Backed Bumpers

Square

- Bumpers can be attached to a wide variety of surfaces; aluminum, ceramic, formica, glass, painted surfaces, polyethylene, polypropylene, vinyl, and steel.
- Quick and easy installation—simply peel off backing and press into place. With no holes to drill, and no screws or rivets needed, adhesive backed bumpers will save you time and money.
- Adhesive backed bumpers are nonmarking, nonstaining, skid, and scratch resistant.
- Surface must be clean, dry, and free of grease, oil, and other common solvents to obtain maximum adhesion. Clean surfaces with low strength solvents such as Isopropyl Alcohol or Heptane.
- Recommended storage guidelines: temperature range 40 to 75°F (4 to 24°C), humidity range 40 to 60%.
- Clear and white parts have an anti-yellowing agent.
- Clear bumpers have acrylic-based pressure sensitive adhesive with an end use temperature of 0°F–250°F (-20°C–120°C). The pigmented products are available in four colors and have a rubber-based pressure sensitive adhesive with an end use temperature of 0°F–180°F (-20°C–82°C).

PART NO.					DESCRIPTION	PART SPECIFICATIONS/DIMENSIONS				Pieces Per Pad
Clear	Black	White	Gray	Brown		A Width		B Height		
						in.	mm.	in.	mm.	
N020	N120	N220	N320	N420*	SBA 4040-10	.40	10,2	.10	2,5	242
N004	N104	N204	N304	N404*	SBA 7575-34	.75	19,1	.34	8,6	98
N036	N136	N236	N336	N436*	SBA 100100-18	1.00	25,4	.18	4,6	55

* Recognized under the Component Program of Underwriters' Laboratories File #E196663.




Tapered & Conical


PART NO.					DESCRIPTION	PART SPECIFICATIONS/DIMENSIONS						
Clear	Black	White	Gray	Brown		A Width		B Length		C Height		Pieces Per Pad
						in.	mm.	in.	mm.	in.	mm.	
N037	N137	N237	N337	N437	*TBA 720-56	.72	18,3	—	—	.56	14,2	98
N009	N109	N209	N309	N409	TBA 5050-12	.50	12,7	.50	12,7	.12	3,0	200
N010	N110	N210	N310	N410	TBA 5050-20	.50	12,7	.50	12,7	.23	5,1	200
N019	N119	N219	N319	N419	TBA 8181-30	.81	20,6	.81	20,6	.30	7,6	98

*TBA 720-56 is conical shaped.

Recognized under the Component Program of Underwriters' Laboratories File #E196663.

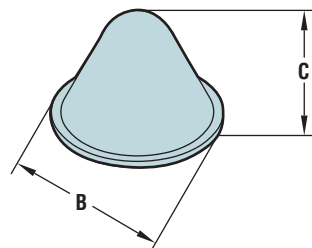

*TBA 720-56

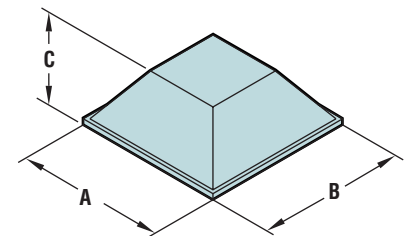

ALL OTHER TYPES