



"Quick Twist" Fittings

Straight Snap-In Cost Saving Fittings

For use with Heyco-Flex™ Conduit and Tubing


- Snap-in Connectors are UL approved for use with Heyco-Flex™ II tubing. NPT-threaded connectors are UL approved for use with Heyco-Flex™ I conduit.
- Low cost electrical connector in four sizes (1/4", 3/8", 1/2", 3/4").
- One-piece solution with smooth internal surfaces provides for easier wire routing, protection, and installation.
- All nylon construction is resistant to salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL certification and testing.
- Easy, permanent assembly: the installer "twists" the tubing over the connector ferrule, until the tubing "clicks" into place. It's that easy!
- No tools needed for installation.
- Unique locking fingers accommodate various chassis thicknesses.
- Suitable for a wide array of electrical applications:
 - Commercial and Industrial HVAC Systems
 - Motorized Equipment
 - Enclosed Power Sources
 - Garage Door Openers
 - Major Appliances
- See page 0-22 for Quick Specs.
- Also available: Black and gray finishing collars to neaten rough cut tubing ends (not available in 1/4"). **SEE BELOW**

- 8474** HFC TWIST 3/8 Collar (Black)
- 8482** HFC TWIST 3/8 Collar (Gray)
- 8475** HFC TWIST 1/2 Collar (Black)
- 8483** HFC TWIST 1/2 Collar (Gray)
- 8476** HFC TWIST 3/4 Collar (Black)
- 8484** HFC TWIST 3/4 Collar (Gray)



FITS CONDUIT/TUBING TRADE SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS									
	Black	Gray		A Mounting Hole Dia.		B Overall Length		C Body Length		D Wrenching Nut		E Wrenching Flats	
				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/4	8515	8516	HFC 1/4-S-twist	.540	13,7	1.330	33,8	.344	8,7	.090	2,3	.750	19,0
3/8	8485	8486	HFC 3/8-S-twist	.875	22,2	1.376	35,0	.391	9,9	.090	2,3	1.000	25,4
1/2	8490	8491	HFC 1/2-S-twist	.875	22,2	1.376	35,0	.391	9,9	.090	2,3	1.000	25,4
3/4	8495	8496	HFC 3/4-S-twist	1.093	27,8	1.495	38,0	.390	9,9	.090	2,3	1.250	31,8

Recognized under the Component Program of Underwriters' Laboratories File #E121095. Standard Colors: Black or Gray.

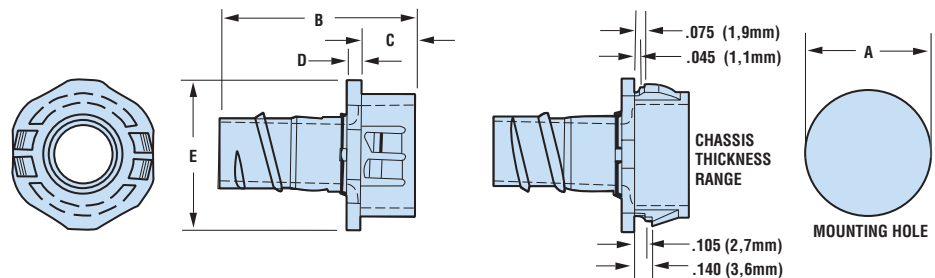

"Quick Twist" Fittings

Straight-NPT Threaded Cost Saving Fittings


For use with Heyco-Flex™ Conduit and Tubing



FITS CONDUIT/TUBING TRADE SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS									
	Black	Gray		A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut		E Wrenching Flats	
				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/4	8517	8518	*HFC 1/4 NPT-twist	.540	13,7	1.56	39,6	.465	11,8	.200	5,1	.750	19,0
3/8	8487	8488	HFC 3/8 NPT-twist	.875	22,2	1.720	43,7	.625	15,9	.200	5,1	1.180	30,0
1/2	8493	8494	HFC 1/2 NPT-twist	.875	22,2	1.720	43,7	.625	15,9	.200	5,1	1.180	30,0
3/4	8497	8498	HFC 3/4 NPT-twist	1.109	28,2	1.840	46,7	.625	15,9	.200	5,1	1.370	34,8

Locknuts are not included. Listed under Underwriters' Laboratories File #E28430. Standard Colors: Black or Gray.

*UL Approval pending.

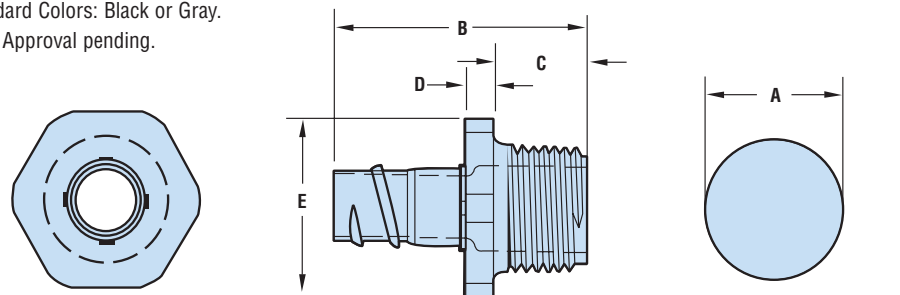

SUGGESTED CLEARANCE HOLE FOR NONTHREADED MOUNTING