



**NEW PRODUCT!**

# Metallic Straight Conduit Fittings


For Nonmetallic Liquid Tight Conduit



FITS CONDUIT/TUBING TRADE SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS BODY AND SEALING UNIT									
			A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Flats	
			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/2	9794	HFC-Z 1/2	.875	22,2	1.595	40,5	.500	12,7	.197	5,0	1.205	30,6
3/4	9795	HFC-Z 3/4	1.109	28,2	1.736	44,1	.520	13,2	.158	4,0	1.417	36,0

Supplied with sealing ring and locknut.

- Designed specifically for electrical applications.
- For outside, inside, and industrial uses including transformer connections, air conditioning, and heating.
- Provides smooth connection, no sharp edges to strip wire.
- Wiring easily pulled through.
- Suitable for use in both wet and dry location.
- UL Listed, CUL Listed.
- Cost effective die-cast zinc construction provides durability and resists rough environments.
- Furnished with locknut and plastic sealing ring.
- Suitable for indoor or outdoor use.
- Fits the most common sizes of nonmetallic liquid tight conduit.
- For use with Heyco Flex I and Flex II Liquid Tight Conduit and Tubing. See Pages 0-15 and 0-16.

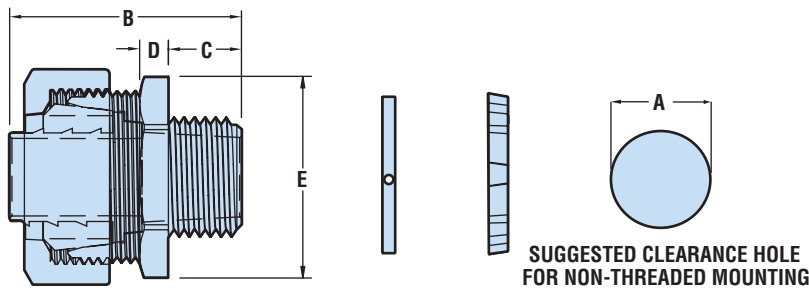

Materials  
Certifications  
Ingress Protection

Die cast zinc  
 Listed under UL File #E-206446  
 Liquid tight when used with Heyco Flex I and Flex II conduit and tubing

*Quick Specs*