


Stamped Steel Nut



Zinc Die-cast Nut

Metal Locknuts

NPT Thread Locknuts




TYPE TRADE SIZE	STAMPED STEEL		ZINC DIE-CAST	
	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
1/2	2250	LN 1/2	9800	LN 1/2 DC
3/4	2251	LN 3/4	9801	LN 3/4 DC
1	2252	LN 1	9802	LN 1 DC

PG Thread Locknuts–Nickel Plated Brass



THREAD SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS			
			A Thickness		B Wrenching Flats	
			in.	mm.	in.	mm.
PG 7	2257	LN PG7	.11	2,8	.59	15,0
PG 9	2258	LN PG9	.11	2,8	.71	18,0
PG 11	2259	LN PG11	.13	3,0	.83	21,0
PG 13.5	2260	LN PG13	.13	3,0	.91	23,0
PG 16	2261	LN PG16	.13	3,0	1.02	26,0
PG 21	2262	LN PG21	.14	3,5	1.26	32,0
PG 29	2263	LN PG29	.16	4,0	1.61	41,0
PG 36	2268	LN PG36	.20	5,0	2.007	51,0
PG 42	2269	LN PG 42	.20	5,0	2.362	60,0

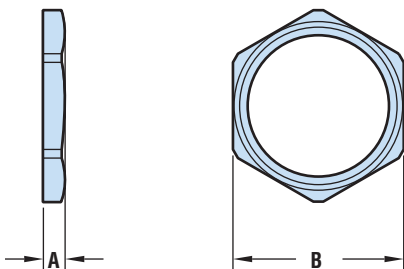

Metric Thread Locknuts–Nickel Plated Brass

THREAD SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS			
			A Thickness		B Wrenching Flats	
			in.	mm.	in.	mm.
M6	2243	M 6 x 1	.110	2,8	.354	9,0
M8	2244	M 8 x 1,5	.110	2,8	.433	11,0
M10	2245	M 10 x 1,5	.110	2,8	.512	13,0
M12	2246	M 12 x 1,5	.118	3,0	.591	15,0
M16	2247	M 16 x 1,5	.118	3,0	.748	19,0
M20	2248	M 20 x 1,5	.138	3,5	.945	24,0
M25	2249	M 25 x 1,5	.138	3,5	1.181	30,0
M32	2253	M 32 x 1,5	.177	4,5	1.417	36,0
M40	2254	M 40 x 1,5	.177	4,5	1.811	46,0
M50	2255	M 50 x 1,5	.217	5,5	2.165	55,0

- For use with Heyco-Flex™ Cordgrips and most electrical fittings.
- Nickel-plated brass finish over brass provides excellent corrosion resistance and durability.
- Metric sizes M6 thru M50 accommodate a wide range of fitting.