





Heyco® Lockit™ Strain Relief Bushings

For Round Cables—Rectangular Mounting Hole



WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.		DESCRIPTION
UL Type Designation	AWG/ Conductors	Approximate Size		Mounting Hole Size		Thickness		Black	White	
		in.	mm.	in.	mm.	in.	mm.			
SV & SVT	18/2	.220-	5,6-	.453 x .512	11,5 x 13,0	.032	0,8	1832	1833	ST-101N
	18/3	.245	6,2			.040	1,0			
	18/3	.255	6,5			.048	1,2			
HPD	18/2	.270	6,9	.689 x .689	17,5 x 17,5	.063	1,6	1836	1837	ST-201N
	16/2	.290	7,4			.099	2,5			
HPD	16/2	.290	7,4	.689 x .689	17,5 x 17,5	.032	0,8	1848	1849	ST-301N
SJ, SJO & SJT	18/2	.300	7,6			.063	1,6			
	16/2	.315	8,0			.099	2,5			
	18/3	.320	8,1			.126	3,2			
	16/2	.325	8,2			.157	4,0			
	18/3	.330	8,4							
	14/2	.350	8,9							
SJT	14/2	.355	9,0							
STO	16/3	.390	9,9							
SEOW-A	16/4	.420	10,6							

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.

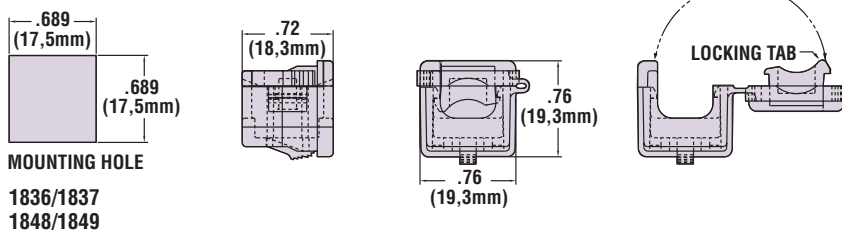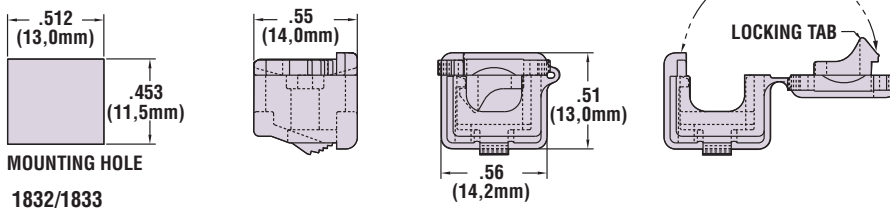

US Patent No. 4,913,385

- Assembly friendly! Independent of insertion into the panel, Lockit Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Lockit Strain Reliefs hold so well they pass the UL pull-out test requirements with or without panel support.
- They protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. And, their rectangular design eliminates the possibility of part rotation under forces of *twist*.
- Lockit's three finger design securely anchors into panel as thin as .032" (0,8mm) and as thick as .157" (4,0mm) for a neat, clean appearance. Five locking steps accommodate a wide range of panel thickness. Low profile head satisfies design aesthetics!
- See page 2-7 for Heyco's automated assembly equipment.
- Standardize panel design! Fill unused Lockit Strain Relief mounting holes with the Heyco Rectangular Plug RP 115-130 (Part No. 1890). See page 2-21.
- See page 2-8 for Designer's Lockit LabKit.

Material 6/6 "Nylon"
 Certifications Recognized under the Component Program of Underwriters' Laboratories File #E-15331
 Certified by the Canadian Standards Association File #LR-8919
 Flammability Rating 94V-2
 Material Temperature Index 125°C—Maximum temperature on part not to exceed 105°C

Quick Specs