



# Multi-Lockit™ For Large Openings


## Strain Reliefs for Round Cables and Flat Cables

### US Patent No. 4,137,602

- Assembly friendly! Independent of insertion into the panel, Lockit Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Large mounting hole design allows passage of plugs or bulky assemblies during Lockit installation.
- Lockit Strain Reliefs hold so well they pass the UL pull-out test requirements with or without panel support.
- They protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. And, their rectangular design eliminates the possibility of part rotation under forces of *twist*.
- Fingertip pressure snaps the Lockit into the mounting hole.
- ST-101A designed to be installed in a "U" shape slot (see schematic). Securely anchors, insulates, and protects cables at panel entry point. Slim head profile makes Lockits' design-specific.
- Please call Heyco for all your tool needs.

WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.		DESCRIPTION
UL Type Designation	AWG/ Conductors	Approximate Size		Mounting/ Chassis Size		Thickness		Black	White	
		in.	mm.	in.	mm.	in.	mm.			
Round Cable	18/3	.250	6,4	1.142 x 1.142	29,0 x 29,0	.032	0,8	1843	1842	LSR1939-300
Flat Cable SPT-3		.173 x .380	4,39 x 9,65							

Standard Colors: Black or White. Consult Heyco for other colors.


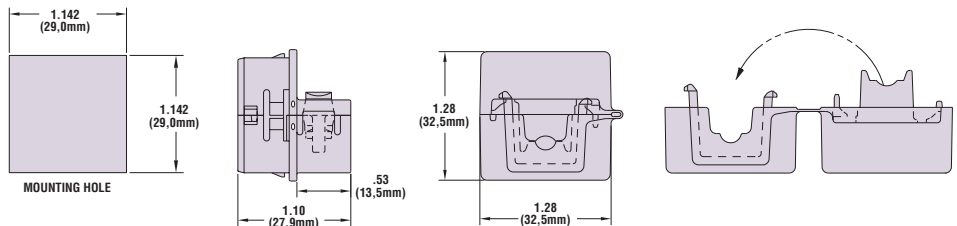


# Lockit™ For U-Shape Slot

## Strain Reliefs for Round Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.		DESCRIPTION
UL Type Designation	AWG/ Conductors	Approximate Size		Mounting/ Chassis Size		Maximum Thickness		Black	White	
		in.	mm.	in.	mm.	in.	mm.			
SV & SVT	18/2	.220-.245	5,6 6,2	.453 x .512	11,5 x 13,0	.062	1,6	1839	1840	ST-101A
	18/3	.250-.255	6,4 6,5							
HPD	18/2	.270	6,9							
	16/2	.290	7,4							

Standard Colors: Black or White. Consult Heyco for other colors.

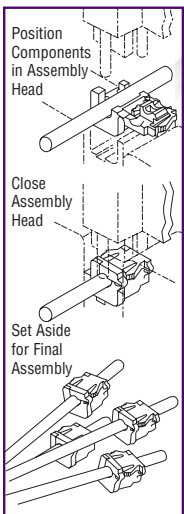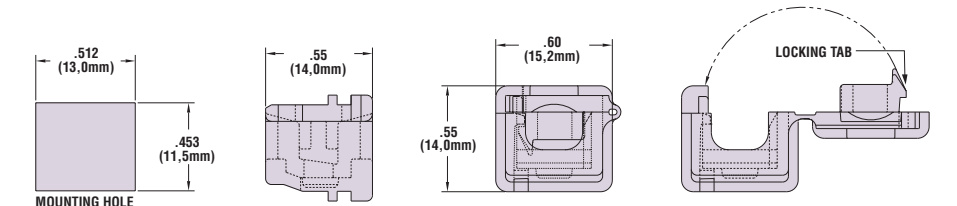

Quick Specs

Material	6/6 "Nylon"
Certifications	Recognized under the Component Program of Underwriters' Laboratories File #E-15331 Canadian Certified by Canadian Standards Association File #LR-8919
Flammability Rating	94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C