




Heyco® Lay-In Strain Relief Bushing

For Split Panel Mounting Holes



WILL FIT THESE CABLES	PANEL DIMENSIONS						PART NO.		DESCRIPTION	BODY LENGTH	
	Cross Section	Approximate Size		Mounting Size		Thickness	Black	White		in.	mm.
		in.	mm.	in.	mm.						
Round, Flat or Multiple	up to .600	up to 15,2	.875 x .875	22,2 x 22,2	.100	2,5	1266	1267	SR 8R-200	.800	20,3

Standard Colors: Black or White. Consult Heyco for other colors.

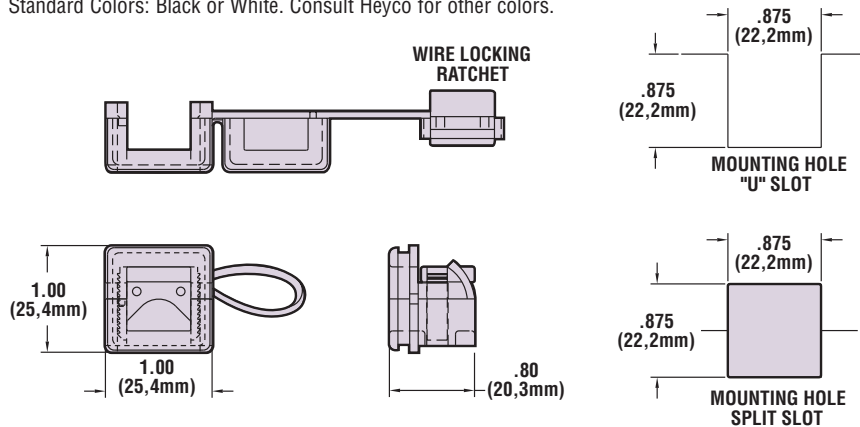

US Patent No. 5,243,139


- Assembly friendly! Independent of insertion into the panel, Lay-In Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Designed to be installed in split panel mounting hole or dropped into a slot (see schematic).
- Unique wire locking ratchet allows for generous wire range from .250" (6,4mm) to .600" (15,2mm).
- Protects against forces of pull, push, or twist.
- Can be used for one cable or bundles of cables (round or flat wire).



Heyco® UL Knot

WILL FIT THESE CABLES				PART DIMENSIONS								PART NO.		DESCRIPTION
UL Type Designation	AWG/ Conductors	Approximate Size		A		B		C		D		Black	White	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.			
SPT-2	18/2	.150 x .280	3,8 x 7,1	.41	10,4	.70	17,8	.29	7,4	.35	8,9	1854	1841	ISR 14-27

Standard Colors: Black or White. Consult Heyco for other colors.
No panel required for application.

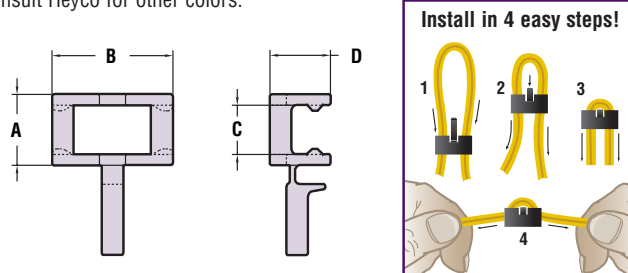

- The Heyco UL Knot is quick and easy to secure on any SPT-2 wire.
- It is cost effective. No cutting or tools needed as with metal clamp type strain reliefs. There is no risk of repetitive motion strain or injury.
- Recognized (far exceeds UL's 35# pull-out test).
- UL Approved for use with SPT-2 Wire.

Material	6/6 "Nylon"
Certifications	Recognized under the Component Program of Underwriters' Laboratories File #E-15331
	Certified by Canadian Standards Association File #LR-8919
Flammability Rating	94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C

Quick Specs