





Heyco® Pigtail™ Strain Relief Bushings

For Flat Cables, With Integral Nylon Spring

- Protects the lifeline of your electric/ electronic products by absorbing forces of pull, push, twist, and FLEX.
- Not recommended for applications where the power supply cord is subject to whipping or "jump rope" type motion.
- Adds reliability, longevity, and safety. Will pass CSA's 50,000 cycle "vacuum cleaner" test (C22.2 No. 67).
- Securely anchors, insulates, and protects cables at panel entry points.
- Integral nylon spring eases the cable into a lazy bend; prevents sharp bending and assures longest cable and product life.
- Standardize panel design! Fill unneeded SR mounting holes with Heyco Double "D" Plugs, page 2-21.
- See pages 2-24, 2-25, and 2-26 for assembly tools and SR hole punches.

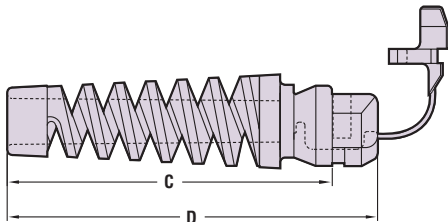

| UL Type Designation | AWG/ Conductors | WILL FIT THESE CABLES | | PANEL DIMENSIONS | | | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS C | | PART DIMENSIONS D | | |
|---------------------|-----------------|-----------------------|---------|------------------|------|-----------------------|------|--------------------------------------|-----|----------|-------|-------------|-------------------|------|-------------------|------|--|
| | | Approximate Size | | A Mounting Hole | | B To Prevent Rotation | | Maximum Panel Thickness ¹ | | Black | White | | Extension Length | | Body Length | | |
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | | | | in. | mm. | in. | mm. | |
| SPT-1 | 18/3 | .12X.30 | 3,0X7,6 | | | | | | | | | | | | | | |
| SPT-2 & HPN | 18/2 | .15X.28 | 3,8X7,1 | .500 | 12,7 | .465 | 11,8 | .062 | 1,6 | 1541 | 1542 | SR 4N-7 | 1.718 | 43,6 | 1.984 | 50,4 | |

Standard Colors: Black or White. Consult Heyco for other colors. Consult factory for color matching, prices, and minimum order quantities.

¹Maximum Panel Thickness—Part has additional clearance.

For Round Cables, With Integral Nylon Spring

| UL Type Designation | AWG/ Conductors | WILL FIT THESE CABLES | | PANEL DIMENSIONS | | | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS C | | PART DIMENSIONS D | | | |
|-------------------------------|-----------------|-----------------------|------|----------------------|-----------|-----------------------|------|--------------------------------------|------|----------|-------|-------------|-------------------|---------|-------------------|------|-------|------|
| | | Approximate Diameter | | A Mounting Hole Dia. | | B To Prevent Rotation | | Maximum Panel Thickness ¹ | | Black | White | | Extension Length | | Body Length | | | |
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | | | | in. | mm. | in. | mm. | | |
| SV & SVT | 18/2 | .250 | 6,4 | .500 | 12,7 | | | | | | | | | | | | | |
| | 18/3 | .255 | 6,5 | .500-.515 | 12,7-13,1 | | | | | | | | | | | | | |
| HPD | 18/2 | .270 | 6,9 | .500 | 12,7 | .450 | 11,4 | .062 | 1,6 | 1590 | 1591 | SR 5N-7 | 1.703 | 43,3 | 1.984 | 50,4 | | |
| | 16/2 | .290 | 7,4 | .500-.515 | 12,7-13,1 | | | | | | | | | | | | | |
| Same as SR 5N-7 above except | | | | | | | | .125 | 3,2 | 1593 | 1594 | SR 5P-7 | 1.703 | 43,3 | 1.984 | 50,4 | | |
| SJ, SJO & SJT | 18/2 | .300 | 7,6 | .625 | 15,9 | .550 | 14,0 | .062 | 1,6 | 1596 | 1597 | SR 6N-7 | 1.718 | 43,6 | 2.109 | 53,6 | | |
| Same as SR 6N-7 above except | | | | | | | | .125 | 3,2 | 1602 | 1603 | SR 6P-7 | 1.718 | 43,6 | 2.109 | 53,6 | | |
| SJ, SJO & SJT | 16/2 | .315 | 8,0 | | | | | | | | | | | | | | | |
| | 18/3 | .320 | 8,1 | | | | | | | | | | | | | | | |
| | 14/2 | .350 | 8,9 | .625 | 15,9 | .550 | 14,0 | .062 | 1,6 | 1599 | 1600 | SR 6N3-7 | 1.718 | 43,6 | 2.109 | 53,6 | | |
| | 16/3 | .355 | 9,0 | | | | | | | | | | | | | | | |
| | 18/4 | .360 | 9,1 | | | | | | | | | | | | | | | |
| Same as SR 6N3-7 above except | | | | | | | | .125 | 3,2 | 1605 | 1606 | SR 6P3-7 | 1.718 | 43,6 | 2.109 | 53,6 | | |
| SJT | 18/4 | .360 | 9,1 | | | | | | | | | | | | | | | |
| | 14/3 | .370 | 9,4 | | | | | | | | | | | | | | | |
| S & ST | 18/2 | .390 | 9,9 | .750 | 19,0 | | | | | | | | | | | | | |
| | 18/3 | .405 | 10,3 | | | | | | | | | | | | | | | |
| | 16/2 | .405 | 10,3 | | | | | .660 | 16,8 | .125 | 3,2 | 1611 | 1612 | SR 7P-7 | 2.156 | 54,9 | 2.598 | 66,0 |
| | 16/3 | .430 | 10,9 | .750-.781 | 19,0-19,8 | | | | | | | | | | | | | |

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.

¹Maximum Panel Thickness—Part has additional clearance.

Quick Specs

| | |
|----------------------------|---|
| Material | 6/6 "Nylon" |
| Certifications | UL Recognized under the Component Program of Underwriters' Laboratories File #E-15331 |
| | CSA Certified by the Canadian Standards Association File #LR-8919 |
| Flammability Rating | 94V-2 |
| Material Temperature Index | 125°C—Maximum temperature on part not to exceed 105°C |