



Heyco® Bell-Mouth Strain Relief Bushings

For Flat Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.		DESCRIPTION	PART DIMENSIONS			
UL Type Designation	AWG/ Conductors	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Maximum Panel Thickness ¹		Black	White		C Head Length		B Body Length	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.
CLOCK	20/2	.09x.18	2,3x4,6	.375	9,5	.330	8,4	.062	1,6	1020	1021	SR 2P-5	.375	9,5	.625	15,9
SPT2	18/2	.11x.21	2,8x5,3	.437	11,1	.390	9,9	.062	1,6	1080	1081	SR 3P-5	.375	9,5	.625	15,9
SPT-1	18/2	.12x.22	3,0x5,6	.500	12,7	.465	11,8	.062	1,6	1108	1109	SR 4N-5	.406	10,3	.703	17,9
SPT-1	18/3	.12x.30	3,0x7,6	.500	12,7											
SPT-2 & HPN	18/2	.15x.28	3,8x7,1	.500	12,7	.515	13,1	.062	1,6	1108	1109	SR 4N-5	.406	10,3	.703	17,9
	16/2	.16x.30	4,1x7,6	.500	12,7											
HPN	18/3	.15x.34	3,8x8,6	.625	15,9	.550	14,0	.125	3,2	1229	1230	SR 6K-5	.406	10,3	.813	20,7
	16/3	.16x.37	4,1x9,4													
SPT-2	16/2	.16x.30	4,1x7,6	.625	15,9	.550	14,0	.125	3,2	1229	1230	SR 6K-5	.406	10,3	.813	20,7
	16/3	.16x.41	4,1x10,4													

Standard Colors: Black or White. Consult Heyco for other colors. Consult factory for color matching, prices, and minimum order quantities.
¹Maximum Panel Thickness-Part has additional clearance.

For Round Cables


WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.		DESCRIPTION	PART DIMENSIONS				
UL Type Designation	AWG/ Conductors	Approximate Diameter		A Mounting Hole Dia.		B To Prevent Rotation		Maximum ¹ Panel Thickness		Black	White		C Head Length		B Body Length		
		in.	mm.	in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.	
SV & SVT	18/2	.250	6,3	.500	12,7	.450	11,4	.062	1,6	1143	1144	SR 5N-5	.406	10,3	.688	17,5	
	18/3	.255	6,5	.500-.515	12,7-13,1												
HPD	18/2	.270	6,9	.500	12,7	.550	14,0	.125	3,2	1226	1227	SR 6P-5	.421	10,7	.813	20,7	
	16/2	.290	7,4	.500-.515	12,7-13,1												
SJ, SJO & SJT	18/2	.300	7,6	.625	15,9	.550	14,0	.125	3,2	1232	1233	SR 6P2-5	.421	10,7	.813	20,7	
	16/2	.315	8,0	.625	15,9												
	18/3	.320	8,1														
SJ, SJO & SJT	16/2	.325	8,2	.625	15,9	.550	14,0	.062	1,6	1223	1224	SR 6N3-5	.421	10,7	.813	20,7	
	18/3	.330	8,4														
	14/2	.350	8,9														
	16/3	.355	9,0														
	18/4	.360	9,1														
Same as SR 6N3-5 above except									.125	3,2	1220	1221	SR 6P3-5	.468	11,9	.813	20,7

Standard Colors: Black or White. Consult Heyco for other colors. Consult factory for color matching, prices, and minimum order quantities.
¹Maximum Panel Thickness-Part has additional clearance.

Material	6/6 "Nylon"
Certifications	Recognized under the Component Program of Underwriters' Laboratories File #E-15331 Certified by the Canadian Standards Association File #LR-8919
Flammability Rating	94V-2
Material Temperature Index	125°C—Maximum temperature on part not to exceed 105°C



- Protects the lifeline of your electric/electronic products by absorbing forces of pull, push, twist, and FLEX.
- Securely anchors, insulates, and protects cable at panel entry points.
- Flared "trumpet" exit eases the cable into a lazy bend, prevents sharp bending, and assures longer cable and product life.
- See pages 2-24, 2-25, and 2-26 for assembly tools and SR hole punches.

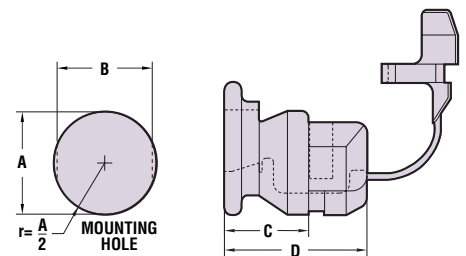

Quick Specs