





# Quick Connect Terminals

## Insulation Support Terminals


- Available in brass and pre-tinned brass.
- Quick Connects allow you to easily choose the right terminals for your application.
- Field Tested.
- Can be applied with your existing equipment or with Heyco applicators.
- These applicators offer reliable connections semi-automatically and by integration into automated termination.
- Most popular configurations available:
  - .110" straight
  - .187" straight
  - .250" straight or flag
- Listed under Underwriters' Laboratories File #E-137778.
- Certified by Canadian Standards Association File #LR-97795.
- Consult Heyco for many additional terminal options not listed here.

PART NO.	MATERIAL	WIRE RANGE	FEEDS	MATING TAB DIMENSION	STOCK THICKNESS	PART DIMENSIONS			
						Insulation Diameter	W	L	D
7920	Brass	18-14 AWG	Traverse	.250 x .032	.016	.120/.170	.296	.750	.300
7921	Pre-tin Brass								
7922	Brass								
7923	Pre-tin Brass	18-14 AWG	Traverse	.250 x .032	.018	.120/.170	.296	.750	.300
7930	Brass								
7931	Pre-tin Brass								
7932	Brass	18-16 AWG	Traverse	.187 x .032	.016	.090/.130	.232	.590	.250
7933	Pre-tin Brass								
7940	Brass								
7941	Pre-tin Brass	22-18 AWG	Traverse	.110 x .020	.010	.060/.100	.148	.640	.250
7942	Brass								
7943	Pre-tin Brass								

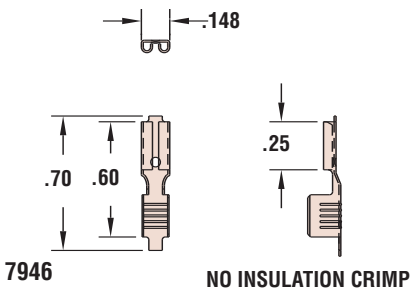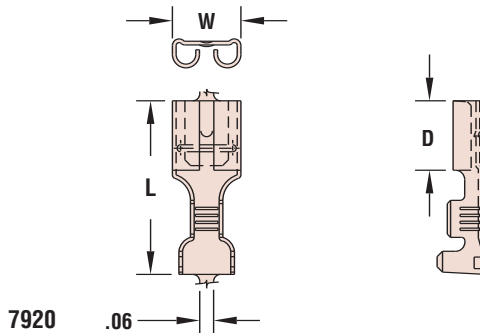

## Noninsulation Support Terminal

PART NO.	MATERIAL	WIRE RANGE	FEEDS	MATING TAB DIMENSION	STOCK THICKNESS	PART DIMENSIONS		
						W	L	D
7946	Brass	16-12 AWG	Traverse	.110 x .020	.010	.148	.600	.250

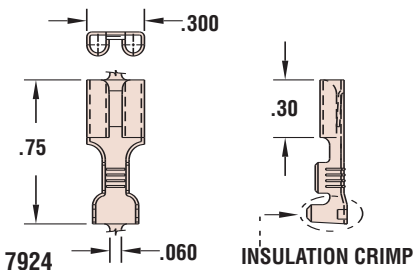

## Low Insertion Force Insulation Support Terminal

PART NO.	MATERIAL	WIRE RANGE	FEEDS	MATING TAB DIMENSION	STOCK THICKNESS	PART DIMENSIONS			
						Insulation Diameter	W	L	D
7924	Brass	18-14	Traverse	.250	.032	.120/.170	—	—	—
7925	Pre-tin Brass	18-14	Traverse	.250	.032	.120/.170	.30	.75	.30