




Heyco® Screw to Tab Terminal Blocks

Screw to (2) Tabs

WIRE SIZE AWG	MM ²	AMPS		POLES	PART NO. Brown	DESCRIPTION	Screws (Metric)	PART DIMENSIONS							
		North America	Europe					A		B		C		D	
								in.	mm.	in.	mm.	in.	mm.	in.	mm.
Standard															
10-14	4	20	16	2	1554	FV 77-2	M 3,5 x 7	.984	25,0	1.043	26,5	.846	21,5	N/A	N/A
				3	1556	FV 77-3	M 3,5 x 7	1.614	41,0	1.043	26,5	.846	21,5	.550	14,0
				4	1558	FV 77-4	M 3,5 x 7	2.244	57,0	1.043	26,5	.846	21,5	.550	14,0
With Wire Protector Flap															
10-14	4	20	16	2	1555	FV 77-2 WP	M 3,5 x 7	.984	25,0	1.043	26,5	.846	21,5	N/A	N/A
				3	1557	FV 77-3 WP	M 3,5 x 7	1.614	41,0	1.043	26,5	.846	21,5	.550	14,0
				4	1559	FV 77-4 WP	M 3,5 x 7	2.244	57,0	1.043	26,5	.846	21,5	.550	14,0

Standard Color: Flame retardant brown.

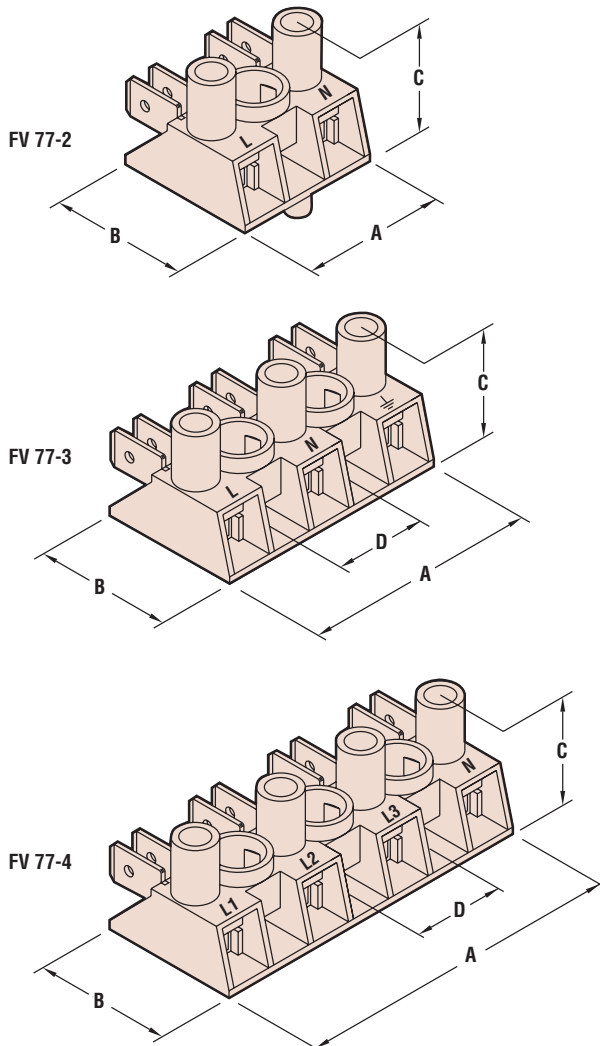

- High working temperature capability.
- Available in Standard form for solid wire and Wire Protection form for stranded or solid wire.
- Two .250" by .031" (6,4 by 0,8mm) tabs per pole.
- FV 77-2 poles are marked L and N.
- FV 77-3 poles are marked L,N and .
- FV77-4 poles are marked L1, L2, L3, and N.
- All sizes are rated at 600 volts (380 volts in Europe).
- Affix to chassis with No. 8 (M4) screws and nuts or use self tapping screws. An anti-rotation spigot is incorporated into the base.
- Molded of type 6/6 glass filled nylon. Self-extinguishing. Flammability classification 94V-0; temperature index 150°C.
- Recognized under the Component Program of Underwriters' Laboratories File #E-76048.
- Certified by Canadian Standards Association File #LR-40455.
- Approval report 8721-1440-4002.