





## Aluminum Solderless Connectors

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	HEIGHT WITH MAX. WIRE		PART DIMENSIONS					
					A Width		B Length		Bolt Size	
			in.	mm.	in.	mm.	in.	mm.	in.	mm.
6-14	<b>1863</b>	A35	1/2	12,7	3/8	9,5	1-1/16	27,0	1/4	6,4
2-14	<b>1864</b>	A90	9/16	14,3	1/2	12,7	1-5/32	29,4		




- Made from high strength, high Conductivity 6061-T6 aluminum alloy.
- Compact design—lightweight yet strong.
- Requires no special installation tools.
- Electro-tin plated for low contact resistance and corrosion protection when used with copper conductors.
- Ports are marked with catalog description and conductor range.
- Listed under Underwriter's Laboratories E-80121.
- Certified by Canadian Standards Association File #LR-211103.
- UL and CSA certified for use with copper and aluminum conductors.

## Copper Lug Connectors



### Copper Single Hole Offset Lugs

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	CURRENT RATING AMPS	HEIGHT WITH MAX. WIRE		PART DIMENSIONS				Bolt Size	
						A Tang Width		B Length			
				in.	mm.	in.	mm.	in.	mm.	in.	mm.
10-14	<b>1850</b>	CB 25	25	11/16	17,5	5/16	7,9	1	25,4	1/8	3,2
6-14 & Comb**	<b>1851</b>	CB 35	50	3/4	19,1	3/8	9,5	1-3/16	30,2	3/16	4,8


\*\*10/2, 12/2, 14/2, 10/1 and 12/1, 12/1 and 14/1.



1850



1851

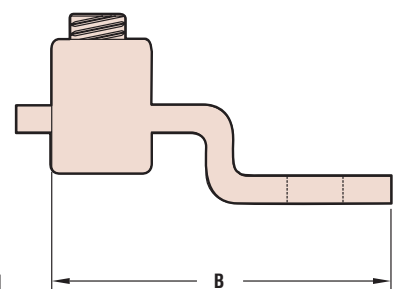

- Made from seamless, pure electrolytic copper.
- 100% conductivity for highest efficiency.
- Completely reuseable.
- Requires no special installation tools.
- UL listed and CSA certified for use with copper conductors.
- Marked with catalog description and conductor range.
- Listed under Underwriter's Laboratories E-80121.
- Certified by Canadian Standards Association File #LR-211103.