

Female Quick Disconnects

Bare Butted Seam

Wire Size	Tab Width	Part Number
22-18	.110 x .020	10191
	.187 x .020	10192
	.205 x .020	10193
	.250 x .032	10176
.....		
16-14	.110 x .020	10194
	.187 x .020	10195
	.205 x .020	10196
	.250 x .032	10180
.....		
12-10	.250 x .032	10187
	.375 x .032	10166



3-Pc Nylon w/ Sleeve

Wire Size	Tab Width	Part Number
22-18	.110 x .020	30191
	.187 x .020	30192
	.205 x .020	30176
	.250 x .032	30176
.....		
16-14	.110 x .020	30194
	.187 x .020	30195
	.205 x .020	30180
	.375 x .032	30375
.....		
12-10	.187 x .032	30167
	.250 x .032	30187
	.375 x .032	30166
	Larger Barrel .250 x .032	30187B



Vinyl Insulated

22-18	.110 x .020	20191
	.187 x .020	20192
	.187 x .020	50192
	.205 x .020	20193
	.205 x .020	50193
16-14	.250 x .032	50176
	.110 x .020	20194
	.187 x .020	20195
	.187 x .020	50195
	.205 x .020	20196
	.205 x .020	50196
12-10	.250 x .032	50180
	.375 x .032	20375
	.187 x .032	20167
	.250 x .032	50187
Larger Barrel	.375 x .032	20166
	.250 x .032	50187B



Heat Shrink

22-18	.110 x .020	40191
	.187 x .020	40192
	.250 x .032	40176
.....		
16-14	.110 x .020	40194
	.187 x .020	40195
	.250 x .032	40180
	.250 x .032	40180BRS (Brass Sleeve)
.....		
12-10	.250 x .032	40187
	.250 x .032	40187BRS (Brass Sleeve)
	.375 x .032	40166



Nylon Insulated

22-18	.187 x .020	50192N
	.205 x .020	50193N
	.250 x .032	50176N
.....		
16-14	.187 x .020	20195N
	.187 x .020	50195N
	.205 x .020	50196N
	.250 x .032	50180N
	.375 x .032	20375N
	.375 x .032	20375N
12-10	.187 x .032	20167N
	.250 x .032	50187N Rolled
	.375 x .032	20166N
	.250 x .032	50213N Folded



The part numbers beginning in "2" are Extruded Vinyl.

The parts numbers beginning in "5" are Injection Molded with funnel entry.

Bare Butted Seam

Wire Size	Tab Width	Part Number
22-18	.110 x .020	10088
	.187 x .020	10197
	.250 x .032	10177*



16-14	.110 x .020	10089
	.187 x .020	10198
	.250 x .032	10181



12-10	.250 x .032	10186*
-------	-------------	--------



Bare Brazed Seam

22-18	.250 x .032	10177BZ
	.187 x .020	10197BZ



16-14	.250 x .032	10181BZ
	.187 x .020	10198BZ



12-10	.250 x .032	10186BZ
-------	-------------	---------



Vinyl Insulated

22-18	.110 x .020	20088
	.187 x .020	50197
	.250 x .032	50177*



16-14	.110 x .020	20089
	.187 x .020	50198
	.250 x .032	50181



12-10	.250 x .032	50186*
-------	-------------	--------



Nylon Insulated

22-18	.250 x .032	50177N*
	.187 x .020	50197N



16-14	.187 x .020	20198N
	.250 x .032	50181N*



12-10	.250 x .032	50186N*
-------	-------------	---------



3-Pc Nylon w/ Sleeve

22-18	.187 x .020	30197
	.250 x .032	30177



16-14	.187 x .020	30198
	.250 x .032	30181



12-10	.250 x .032	30186
-------	-------------	-------



Heat Shrink

22-18	.187 x .020	40197
	.250 x .032	40177




16-14	.187 x .020	40198
	.250 x .032	40181



12-10	.250 x .032	40186
-------	-------------	-------



Quick Disconnects - Fully Insulated

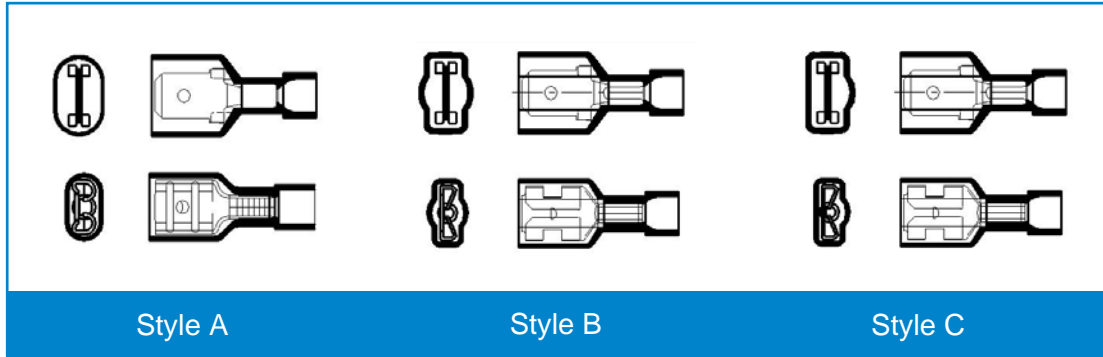

Style A

Style B

Style C

Nylon

Wire Size	Style	Tab Width	Part Number
22-18	A	.250 x .032 MALE	20178
	A	.250 x .032 FEM.	20179
	B	.250 x .032 MALE	50206
	B	.250 x .032 FEM.	50207
	C	.250 x .032 MALE	50206-1Hump
	C	.250 x .032 FEM.	50207-1Hump
16-14	A	.250 x .032 MALE	20182
	A	.250 x .032 FEM.	20183
	B	.250 x .032 MALE	50208
	B	.250 x .032 FEM.	50209
	C	.250 x .032 MALE	50208-1Hump
	C	.250 x .032 FEM.	50209-1Hump
12-10	C	.250 x .032 FEM.	50213-1Hump
	B	.250 x .032 MALE	50212
	B	.250 x .032 FEM.	50213

3-Pc Fully Nylon w/Sleeve

22-18	A	.110 x .020 FEM.	32191	NEW
	C	.187 x .020 MALE	32197	
	C	.187 x .020 FEM.	32192	
	A	.250 x .032 MALE	30178	
	A	.250 x .032 FEM.	30179	
16-14	C	.187 x .020 MALE	32198	NEW
	C	.187 x .020 FEM.	32195	
	A	.250 x .032 MALE	30182	
	A	.250 x .032 FEM.	30183	
12-10	C	.250 x .032 FEM.	30199	NEW
	A	.250 x .032 FEM.	30213	
	A	.250 x .032 MALE.	30212	

Fully Insulated Vinyl

16-14	A	.187 x .020 FEM.	52195	NEW
-------	---	------------------	-------	------------

Heat Shrink

Wire Size	Style	Tab Width	Part Number
22-18	A	.250 x .032 MALE	44178
	A	.250 x .032 FEM.	44179
	B	.250 x .032 MALE	40206
	B	.250 x .032 FEM.	40207
	C	.187 x .020 FEM.	42192
16-14	A	.250 x .032 MALE	44182
	A	.250 x .032 FEM.	44183
	B	.250 x .032 MALE	40208
	B	.250 x .032 FEM.	40209
12-10	B	.250 x .032 MALE	40212
	B	.250 x .032 FEM.	40213

NEW Style: Tubing has been shortened to expose the improved crimping area.



Heat Shrink (NEW STYLE)

22-18	B	.250 x .032 MALE	90206
	B	.250 x .032 FEM.	90207
	C	.187 x .020 FEM.	92192
16-14	B	.250 x .032 MALE	90208
	B	.250 x .032 FEM.	90209