



# HEYbrid™ Plated Steel Liquid Tight Cordgrips

## Straight-Thru, NPT Hubs

Don't get SKU'ed: More Cable Range, Fewer SKU's!




*The Ultimate in Liquid Tight Strain Relief Protection*



- **HEYCo-molded gripping finger/gland technology** accommodates the **widest cable range** over the **fewest sku's**.
- Rolled threads **prevent galling** and allow for multiple assemblies and disassemblies.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- Sealing washer required for through hole applications only.
- Typical applications: Control cabinets, car washes, hot tubs, instrumentation, carpet cleaning machines, underground for direct burial or submersed up to 130 ft. (70 PSIG).
- Constructed from corrosion resistant Zinc Plated steel.
- Resistant to salt water, acids and most chemicals.
- Patent pending.
- DFARS Compliant

CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS												
Minimum		Maximum					A	B	C	D	E	Clearance Hole Dia.		Max. O.A. Length		Thread Length		Wrenching Nut Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
<b>HEYCo-molded Finger/Gland</b>																			
.065	1,7	.210	5,3	<b>M6200</b>	RPSCG 1/4	RA	.540	13,7	1.29	32,8	.45	11,4	.20	5,1	.75	19,0			
.115	2,9	.250	6,4	<b>M6201</b>	PSCG 1/4														
.065	1,7	.230	5,8	<b>M6202</b>	RPSCG 3/8	RA	.680	17,3	1.41	35,8	.49	12,4	.20	5,1	.83	21,1			
.105	2,7	.315	8,0	<b>M6203</b>	PSCG 3/8														
.095	2,4	.290	7,4	<b>M6206</b>	RPSCG 1/2	UL	.875	22,2	1.70	43,2	.61	15,5	.20	5,1	1.06	27,0			
.170	4,3	.450	11,4	<b>M6207</b>	PSCG 1/2														
.180	4,6	.400	10,1	<b>M6208</b>	RPSCG LL 1/2	UL	.875	22,2	1.68	42,7	.44	11,2	.20	5,1	1.25	31,2			
.260	6,6	.545	13,8	<b>M6209</b>	PSCG LL 1/2														
.250	6,4	.490	12,4	<b>M6210</b>	RPSCG 3/4	UL	1.040	26,4	2.00	50,8	.62	15,7	.20	5,1	1.31	33,3			
.435	11,0	.705	17,9	<b>M6211</b>	PSCG 3/4														
.490	12,4	.785	19,9	<b>M6212</b>	RPSCG 1	UL	1.326	33,7	2.41	61,2	.76	19,3	.20	5,1	1.75	44,4			
.590	15,0	1.000	25,4	<b>M6213</b>	PSCG 1														

## The HEYCo-molded Finger, Gland and Seat

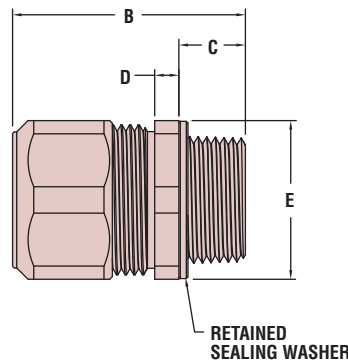

Material	Zinc Plated Steel Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 cRAus Recognized under Underwriters' Laboratories File E51579
Flammability Rating	94V-2
Temperature Range	-4°F (-20°C) to 212°F (100°C)
IP Rating	IP68 (70 PSI, 5 BAR)