




Heyco® Halogen and Phosphorus-Free 94V-0 Hole Plugs

Heat Stabilized • Self Extinguishing • Nontoxic • UV Resistant
 Mounting Hole Diameter Range: .187" (4,7 mm) to 2.000" (50,8 mm)

- **Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases.** Also formulated for sunlight resistance. Other Heyco products are available in this material—please consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge (Except HFP-187 glossy finish).
- Lock firmly into panel up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.
- Multiple sizes for use in .187" (4,7 mm) to 2.000" (50,8 mm) diameter holes. Consult Heyco for larger sizes.

| MOUNTING HOLE DIAMETER | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | |
|---|--------|-------------|-------------|-----------------|--------------------|-----|---------------------|
| in. | mm. | | | Black | A Head Diameter | | B Overall Height |
| | | | | in. | mm. | in. | mm. |
| Single Locking Step for Panel Thickness up to .062" (1,6 mm) | | | | | | | |
| .187 | 4,7 | 2593 | HFP 187* | .25 | 6,4 | .24 | 6,1 |
| .250 | 6,4 | 2606 | HFP 250 | .31 | 7,9 | .31 | 7,9 |
| .312 | 7,9 | 2616 | HFP 312 | .38 | 9,5 | | |
| Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm) | | | | | | | |
| .375 | 9,5 | 2623 | HFP 375 | .47 | 11,9 | .41 | 10,3 |
| .437 | 11,1 | 2636 | HFP 437 | .53 | 13,5 | | |
| .500 | 12,7 | 2646 | HFP 500 | .58 | 14,7 | | |
| .625 | 15,9 | 2666 | HFP 625 | .72 | 18,2 | | |
| .750 | 19,1 | 2686 | HFP 750 | .92 | 23,4 | .45 | 11,5 |
| .875 | 22,2 | 2706 | HFP 875 | 1.02 | 25,8 | | |
| 1.000 | 25,4 | 2716 | HFP 1000 | 1.20 | 30,6 | | |
| 1.093 - | 27,8 - | 2729 | HFP 1093 | 1.22 | 30,9 | | |
| 1.125 | 28,6 | | | | | | |
| 1.250 | 31,7 | 2749 | HFP 1250 | 1.38 | 34,9 | | |
| 1.375 | 34,9 | 2759 | HFP 1375 | 1.50 | 38,1 | | |
| 1.500 | 38,1 | 2769 | HFP 1500 | 1.69 | 42,8 | | |
| 1.750 | 44,5 | 2779 | HFP 1750 | 1.92 | 48,7 | | |
| 2.000 | 50,8 | 2789 | HFP 2000 | 2.17 | 55,1 | .47 | 11,9 |

Standard color black.
 *Convex, glossy finish head.

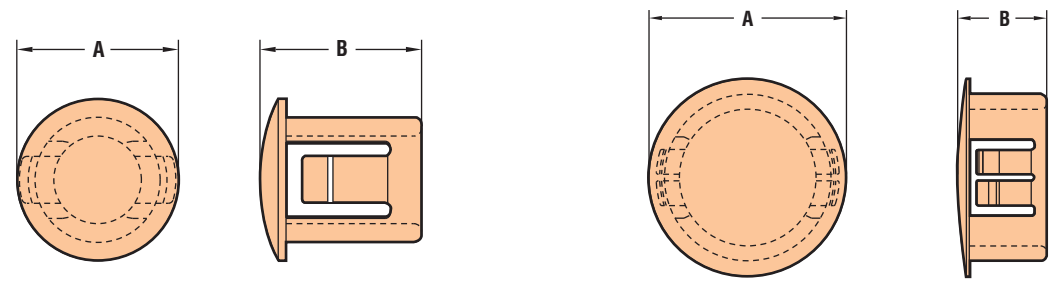

SINGLE PANEL THICKNESS DESIGN

MULTIPLE PANEL THICKNESS DESIGN



Material: Nylon 6/6
 Certifications: Recognized under the Component Program of Underwriters' Laboratories File E51579
 Certified by the Canadian Standards Association File 8919
 Flammability Rating: 94V-0
 Temperature Range: -40°F (-40°C) to 221°F (105°C)