

“Stay Connected” with



Solar Power Components




a PennEngineering® Company



## Heyco® Heavy Duty Lockit P Clamps Steel Mounting Tab

- Available in three different sizes to accommodate a variety of cables ranging from 1.5” to 3” in diameter.
- Unique design allows for installation of Heavy Duty Lockit P Clamps to be independent of cable installation.
- Release feature allows for serviceability or field maintenance.
- Inner diameter ribs offer some axial retention.
- Steel mounting tab provides reliable, long-lasting hold in harsh environments typical in solar array fields.

MOUNTING HOLE DIA.		MAX SCREW SIZE		MAX BUNDLE DIA. A		PART NO.		DESCRIPTION	PART DIMENSIONS			
in.	mm.	in.	mm.	in.	mm.	Black Zinc Plated Steel Insert	Black 304 Stainless Steel Insert		Overall Height B		Width C	
								in.	mm.	in.	mm.	
.41	10,4	.375	10,0	1.50	38,1	15474B	25474B	HDLC 1500-410	2.25	57,2	1.50	38,1
				2.00	50,8	15478B	25478B	HDLC 2000-410	2.81	71,4		
				3.00	76,2	15482B	25482B	HDLC 3000-410	3.82	97,0		

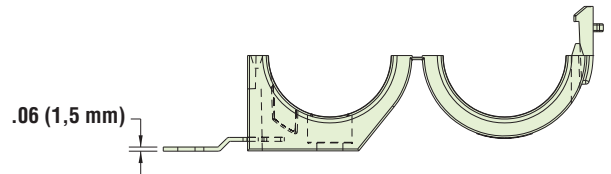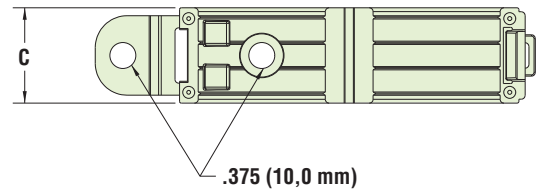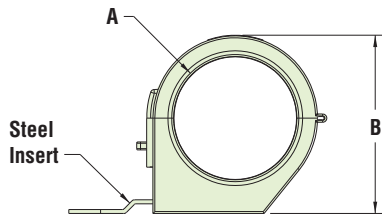

Quick  
Specs

Material	Nylon 6/6 with Zinc Plated Steel Insert or 304 Stainless Steel Insert
Flammability Rating	UL 94V2
Temperature Range	32°F (0°C) to 221°F (105°C)