



Heyco® PG and Metric Threaded Plugs

Round Head with Slot

Plastic



THREAD TYPE/SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS			
	Gray	Black		A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.

PG Threads - Polystyrene

PG 7	3405	3405B	TP PG 7	.59	15,0	.32	8,0
PG 9	3407	3407B	TP PG 9	.75	19,0	.37	9,5
PG 11	3402	3402B	TP PG 11	.87	22,0		
PG 13	3412	3412B	TP PG 13	.98	25,0	.39	10,0
PG 16	3414	3414B	TP PG 16	1.06	27,0		
PG 21	3416	3416B	TP PG 21	1.30	33,0		
PG 29	3418	3418B	TP PG 29	1.73	44,0	.47	12,0
PG 36	3415	3415B	TP PG 36	2.17	55,0	.55	14,0
PG 42	3400	3400B	TP PG 42	2.44	62,0		
PG 48	3417	3417B	TP PG 48	2.72	69,0	.63	16,0


NEW!

Metric Threads - Nylon

M12 x 1,5	3403	3403B	TP M12	.59	15,0		
M16 x 1,5	3404	3404B	TP M16	.79	20,0	.41	10,5
M20 x 1,5	3406	3406B	TP M20	.95	24,0		
M25 x 1,5	3408	3408B	TP M25	1.18	30,0	.51	13,0
M32 x 1,5	3409	3409B	TP M32	1.48	37,0	.53	13,5
M40 x 1,5	3410	3410B	TP M40	1.81	46,0	.55	14,0
M50 x 1,5	3411	3411B	TP M50	2.20	56,0	.63	16,0
M63 x 1,5	3413	3413B	TP M63	2.76	70,0	.71	18,0

Standard color gray and black. Consult Heyco for other colors.

- Used to close unneeded PG and Metric threaded holes when other threaded accessories may be added at a later time.
- Designed with slot for screwdriver installation
- For PG Threaded specifications, see page 3-49
- For Heyco Snap-In Metric Dome Plugs, see page 6-28.
- Nickel-Plated Brass Plugs are ideal where extra durability and strength are needed such as harsh environmental conditions.
- Nickel-Plated Brass Plugs include NBR O-ring



Nickel-Plated Brass

ALL NEW PRODUCTS!

THREAD TYPE/SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS			
				A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.



PG Threads

PG 7	13405		BRASS TP PG 7	.55	14,0	.31	8,0
PG 9	13407		BRASS TP PG 9	.67	17,0	.35	9,0
PG 11	13402		BRASS TP PG 11	.79	20,0		
PG 13	13412		BRASS TP PG 13	.87	22,0		
PG 16	13414		BRASS TP PG 16	.94	24,0	.37	9,5
PG 21	13416		BRASS TP PG 21	1.18	30,0	.43	11,0
PG 29	13418		BRASS TP PG 29	1.54	39,0	.47	12,0
PG 36	13415		BRASS TP PG 36	1.97	50,0	.59	15,0
PG 42	13400		BRASS TP PG 42	2.36	60,0		
PG 48	13417		BRASS TP PG 48	2.56	65,0	.63	16,0

Metric Threads

M6 x1.0	13397		BRASS TP M6*	.35	9,0		
M8 x1.25	13398		BRASS TP M8*	.39	10,0		
M10 x1.5	13399		BRASS TP M10*	.47	12,0	.31	8,0
M12 x 1,5	13403		BRASS TP M12	.55	14,0		
M16 x 1,5	13404		BRASS TP M16	.75	19,0		
M20 x 1,5	13406		BRASS TP M20	.94	24,0	.35	9,0
M25 x 1,5	13408		BRASS TP M25	1.10	28,0	.43	11,0
M32 x 1,5	13409		BRASS TP M32	1.38	35,0	.47	12,0
M40 x 1,5	13410		BRASS TP M40	1.77	45,0	.55	14,0
M50 x 1,5	13411		BRASS TP M50	2.17	55,0	.59	15,0
M63 x 1,5	13413		BRASS TP M63	2.76	70,0	.63	16,0

* Metric course-pitch threads

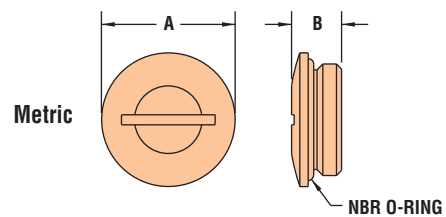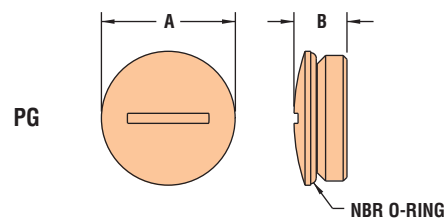

	Plastic TP Plugs	Brass TP Plugs
Material	Nylon 6/6 or Impact Resistant Polystyrene	Nickel-Plated Brass with an NBR O-ring
Flammability Rating	94V-2	
Temperature Range	-4° F (-20° C) to 176° F (80° C)	-40° F (-40° C) to 212° F (100° C)
IP Rating	IP 50	IP 68

