




Heyco® Open/Closed Bushings

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.500" (63,5 mm)

MOUNTING HOLE DIAMETER	PART NO.	DESCRIPTION	PART DIMENSIONS						
			A Inside Diameter		B Head Diameter		C Overall Height		
in. mm.	Black		in.	mm.	in.	mm.	in.	mm.	
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)									
.375 9,5	2865	OCB 375	.27	6,7	.42	10,7	.39	9,9	
.437 11,1	2867	OCB 437	.33	8,4	.50	12,7			
.500 12,7	2871	OCB 500	.31	7,9	.56	14,3			
.562 14,3	2869	OCB 562	.39	9,9	.64	16,3			
.625 15,9	2872	OCB 625	.45	11,1	.69	17,5			
.750 19,1	2873	OCB 750	.55	12,7	.78	19,8	.41	10,3	
.875 22,2	2874	OCB 875	.67	14,3	.92	23,4			
1.000 25,4	2878	OCB 1000	.81	19,1	1.05	26,6			
1.093 27,8	2879	OCB 1093	.88	20,6	1.16	29,4			
1.250 31,8	2881	OCB 1250	1.05	25,8	1.34	34,1			
1.375 34,9	2882	OCB 1375	1.17	25,4	1.47	37,3			
1.500 38,1	2883	OCB 1500	1.25	26,9	1.58	40,1	.42	10,7	
2.000 50,8	2900	OCB 2000	1.73	43,9	2.12	53,9			

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)									
2.500 63,5	2909	OCB 2.5	2.00	50,8	2.60	66,0	.72	18,3	

Standard color black. Consult Heyco for white and other colors.

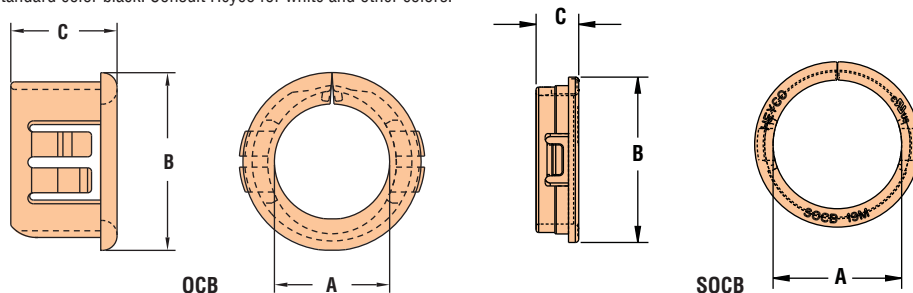

- **Split design allows side entry** and encirclement of preassembled harnesses, capillary tubes, computer cables, power cords, or other assemblies that have segments larger than the bushing's I.D.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in mounting holes from .375" (9,5 mm) to 2.500" (63,5 mm).

Heyco® Shorty Open/Closed Bushings

Single Locking Step for Panel Thickness up to .062" (1,6 mm)
Mounting Hole Diameter Range: 7,0 mm (.276") 27,0 mm (1.063")



MOUNTING HOLE DIAMETER	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
in. mm.	Black		in.	mm.	in.	mm.	in.	mm.
.276 7,0	2934	SOCB 07M	.21	5,3	.35	8,9	.24	6,0
.512 13,0	2938	SOCB 13M	.40	10,2	.60	15,2		
.630 16,0	2941	SOCB 16M	.51	13,0	.73	18,5		
.748 19,0	2943	SOCB 19M	.63	16,0	.85	21,6	.25	6,4
.866 22,0	2945	SOCB 22M	.75	19,1	.98	24,9		
.945 24,0	2947	SOCB 24M	.83	21,1	1.05	26,7		
1.063 27,0	2950	SOCB 27M	.95	24,1	1.18	30,0	.26	6,5

Standard color black. Consult Heyco for white and other colors.

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331 Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-4°F (-18°C) to 221°F (105°C)

- **For use in panels .062" (1,6 mm) and thinner.**
- Lower overall height protrudes less through thin mounting panels; thus Shorty Open/Closed Bushings occupy less "real estate" inside your application.
- **Split design allows side entry** and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.