




## Heyco® Snap Bushings

Mounting Hole Diameter Range: 1.000" (25,4 mm) to 6.0" (152,4 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS				C Overall Height	
		Black	White		A Inside Diameter		B Head Diameter			
in.	mm.				in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)										
1.000	25,4	2140	2141	SB 1000-12	.77	19,4	1.13	28,6	.45	11,5
1.093 - 1.125	27,8 - 28,6	2160	2161	SB 1093-13	.81	20,6	1.22	30,9		
		2163	2164	SB 1093-14	.88	22,2				
		2166	2167	SB 1093-15	.94	23,8				
1.187	30,2	2182	2183	SB 1187-15	.94	23,8	1.31	33,3		
1.250	31,8	2198	2199	SB 1250-15	.94	23,8	1.36	34,5		
		2201	2202	SB 1250-16	1.00	25,4	1.31	33,3		
1.375	34,9	2207	2208	SB 1375-14	.88	22,2	1.49	37,9		
		2210	2211	SB 1375-16	1.01	25,8				
1.500	38,1	2233	2234	SB 1500-17	1.06	27,0	1.61	40,9		
		2236	2237	SB 1500-18	1.13	28,6				
		2240	2241	SB 1500-21	1.31	33,3				
1.750	44,5	2300	2301	SB 1750-22	1.38	34,9	1.88	47,6		
		2.000	50,8	2400	2401	SB 2000-26			1.64	41,6
2406	2414			SB 2000-28	1.75	44,5				
Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)										
2.093	53,1	2415	2416	SB 2.093-29	1.81	46,0	2.35	59,7	.72	18,3
2.250	57,2	2417	2418	SB 2.250-29	1.86	47,1	2.48	63,1		
2.500	63,5	2420	2421	SB 2.500-31	1.97	50,0	2.66	67,5		
3.000	76,2	2461	2462	SB 3.000-39	2.47	62,7	3.15	80,0	.75	19,1
		2424	2425	SB 3.000-44	2.75	69,9	3.16	80,2		
3.375	85,7	2407	2408	SB 3.375-45	2.81	71,4	3.66	93,0	.72	18,3
3.500	88,9	2470	2471	SB 3.500-47	2.94	74,7				
4.000	101,6	2479	2480	SB 4.000-55	3.47	88,1	4.15	105,4	.74	18,8
5.000	127,0	2409	2410	SB 5.000-70	4.38	113,8	5.22	132,6		
		2484	2485	SB 6.000-86	5.38	139,2	6.22	157,9		

Standard colors black and white. Consult Heyco for other colors.

- Convert raw-edged holes to smooth, neat, insulated holes.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .250" (6,4 mm) to 6.00" (152,4 mm) diameter holes.
- We offer the following brass-colored parts for lamp and lighting applications:  
Part No. 2012, SB 312-3 Brass  
Part No. 2033, SB 375-4 Brass  
Part No. 2041, SB 437-4 Brass

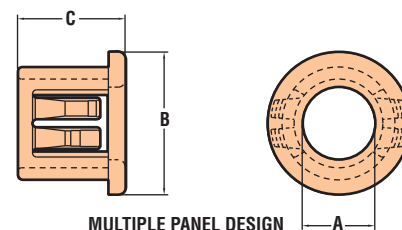

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-4°F (-18°C) to 221°F (105°C)

Quick Specs