




Heyco® Plugs for Square Tubing

PST Series - Clearance Fit

- Heyco Series PST Plugs for Square Tubing **finish raw tubing ends** with a clean finish.
- Sized for different gauges, **fit flush with tubing sides**.
- **Keep dirt and moisture out** of sensitive areas.
- All PST Series Plugs are **.50" (12,7 mm) in depth**.
- **Protect against injury** from sharp tubing edges.
- See page 6-48 for HEYCaps and Plugs for Round Tubing
- See page 6-50 for Heyco Plugs for Rectangular Tubing.

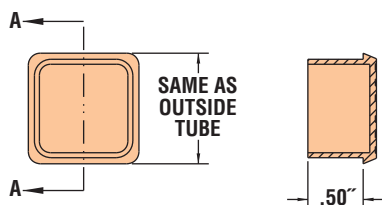


| TUBE DIMENSIONS | | | | Typical Gauge | PART NO. Black | DESCRIPTION |
|-------------------|------|------------------|------|---------------|----------------|-------------|
| Outside Dimension | | Inside Dimension | | | | |
| in. | mm. | in. | mm. | | | |
| .50 | 12,7 | .37 | 9,4 | 16 | G5260 | PST 50-16 |
| .75 | 19,1 | .62 | 15,7 | 16 | G5261 | PST 75-16 |
| 1.00 | 25,4 | .76 | 19,3 | 11 | G5262 | PST 100-11 |
| | | .83 | 21,1 | 14 | G5263 | PST 100-14 |
| | | .87 | 22,1 | 16 | G5264 | PST 100-16 |
| | | .90 | 22,9 | 18 | G5265 | PST 100-18 |
| | | .93 | 23,6 | 20 | G5266 | PST 100-20 |
| 1.25 | 31,8 | 1.01 | 25,7 | 11 | G5267 | PST 125-11 |
| | | 1.08 | 27,4 | 14 | G5268 | PST 125-14 |
| | | 1.12 | 28,4 | 16 | G5269 | PST 125-16 |
| 1.50 | 38,1 | 1.26 | 32,0 | 11 | G5270 | PST 150-11 |
| | | 1.33 | 33,9 | 14 | G5271 | PST 150-14 |
| | | 1.37 | 34,8 | 16 | G5272 | PST 150-16 |
| 2.00 | 50,8 | 1.76 | 44,7 | 11 | G5273 | PST 200-11 |
| | | 1.83 | 46,6 | 14 | G5274 | PST 200-14 |
| | | 1.87 | 47,5 | 16 | G5275 | PST 200-16 |

Standard color black.

PSTR Series - Ribbed Fit



- Heyco PSTR Series Plugs feature **externally tapered ribs** designed to fit a wide range of tubing gauges while accommodating any dimensional fluctuations within the tubing.
- Exterior ribs provide a **sure grip inside the tubing**, without the unsightly plastic shavings found on many straight wall glide installations.
- Not subject to rust or corrosion.
- For larger sizes, please consult Heyco.

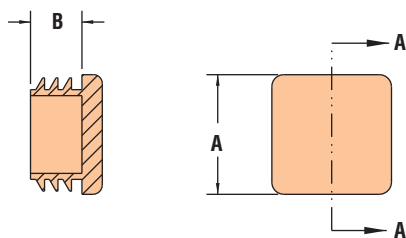

| TUBE DIMENSIONS | | | | | PART NO. Black | DESCRIPTION | PART DIMENSIONS | | | |
|------------------------|---------|---------------|---------------------|---------|----------------|--------------|-----------------|------|------|------|
| Inside Dimension Range | | Typical Gauge | A Outside Dimension | | | | B Depth | | | |
| Minimum | Maximum | | | in. | mm. | in. | mm. | in. | mm. | |
| .37 | 9,4 | .40 | 10,2 | 16 - 18 | G5280 | PST R-50-16 | .50 | 12,7 | .44 | 11,2 |
| .46 | 11,8 | .56 | 14,2 | 14 - 20 | G5281 | PST R-63-14 | .63 | 15,9 | .43 | 10,9 |
| .48 | 12,2 | .58 | 14,8 | 10 - 14 | G5282 | PST R-75-10 | .75 | 19,1 | | |
| .58 | 14,8 | .68 | 17,3 | 14 - 20 | G5283 | PST R-75-14 | | | | |
| .71 | 18,1 | .81 | 20,6 | 14 - 20 | G5284 | PST R-88-14 | | | | |
| .73 | 18,6 | .83 | 21,2 | 10 - 14 | G5285 | PST R-100-10 | 1.00 | 25,4 | | |
| .83 | 21,2 | .93 | 23,6 | 14 - 20 | G5287 | PST R-100-14 | | | | |
| .96 | 24,5 | 1.06 | 26,9 | 14 - 20 | G5289 | PST R-113-14 | 1.13 | 28,6 | .49 | 12,4 |
| .98 | 24,9 | 1.08 | 27,5 | 10 - 14 | G5290 | PST R-120-10 | 1.25 | 31,8 | .52 | 13,2 |
| 1.08 | 27,5 | 1.18 | 30,0 | 14 - 20 | G5291 | PST R-120-14 | | | | |
| 1.11 | 28,2 | 1.21 | 30,8 | 10 - 14 | G5292 | PST R-138-10 | 1.38 | 34,9 | | |
| 1.21 | 30,8 | 1.31 | 33,3 | 14 - 20 | G5293 | PST R-138-14 | | | | |
| 1.23 | 31,3 | 1.33 | 33,9 | 10 - 14 | G5294 | PST R-150-10 | 1.50 | 38,1 | | |
| 1.33 | 33,9 | 1.43 | 36,3 | 14 - 20 | G5295 | PST R-150-14 | | | | |
| 1.48 | 37,6 | 1.58 | 40,2 | 10 - 14 | G5296 | PST R-170-10 | 1.75 | 44,5 | | |
| 1.58 | 40,2 | 1.68 | 42,7 | 14 - 20 | G5297 | PST R-170-14 | | | | |
| 1.52 | 38,7 | 1.67 | 42,4 | 4 - 8 | G5298 | PST R-200-04 | 2.00 | 50,8 | | |
| 1.73 | 44,0 | 1.83 | 46,6 | 10 - 14 | G5299 | PST R-200-10 | | | | |
| 1.83 | 46,6 | 1.93 | 49,0 | 14 - 20 | G5300 | PST R-200-14 | 2.25 | 57,2 | | |
| 1.98 | 50,3 | 2.08 | 52,9 | 10 - 14 | G5301 | PST R-225-10 | | | | |
| 2.09 | 53,2 | 2.23 | 56,7 | 6 - 10 | G5302 | PST R-250-06 | | | 2.50 | 63,5 |
| 2.23 | 56,7 | 2.33 | 59,3 | 10 - 14 | G5303 | PST R-250-10 | 2.50 | 63,5 | .50 | 12,7 |
| 2.37 | 60,2 | 2.45 | 62,2 | 16 - 23 | G5304 | PST R-250-16 | 2.50 | 63,5 | .56 | 14,2 |

Standard color black.

| | |
|-------------------|-------------------------------|
| Material | LDPE |
| Temperature Range | -94°F (-70°C) to 150°F (66°C) |