





- Interlocking surfaces prevent the cable clamp from separating when installing the mounting screw.
- Easily guide and locate wires and cables.
- Designed with rounded edges to prevent chaffing and cutting wire insulation.



CCSA Series

Heyco® Self-Aligning Nylon Cable Clamps

MOUNTING HOLE DIAMETER		SCREW SIZE		PART DIMENSION A		PART NO.		DESCRIPTION
in.	mm.			in.	mm.	Black	Natural	
.390" (9,9 mm) Wide, .04" (1,0 mm) Thick								
.187	4,7	10	.125	3,2	13050B	13050	CCSA 1/8	
			.187	4,7	13051B	13051	CCSA 3/16	
			.250	6,3	13052B	13052	CCSA 1/4	
			.312	7,9	13053B	13053	CCSA 5/16	
			.375	9,5	13054B	13054	CCSA 3/8	
.500	12,7			13056B	13056	CCSA 1/2*		
.500" (12,7 mm) Wide, .06" (1,5 mm) Thick								
.187	4,7	10	.625	15,9	13058B	13058	CCSA 5/8	
			.750	19,1	13060B	13060	CCSA 3/4	
			1.000	25,4	13062B	13062	CCSA 1	

Standard colors black and natural.
*.06" (1,5 mm) Thick




- Locking hinged design holds cables securely in place while providing strain relief.
- Prevents vibration from disrupting cables.



Heyco® Hinged Locking Cable Clamps

MAXIMUM BUNDLE DIA.	PANEL THICKNESS RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS						
	Minimum		Maximum				A Length		B Width		C Height		
	in.	mm.	in.	mm.				in.	mm.	in.	mm.		
.47	12,0	.031	0,8	.047	1,2	12666	CCHL-47-047	1.72	43,7	.47	12,0	1.04	26,5
.59	15,1	.024	0,6	.059	1,5	12665	CCHL-59-059	1.57	39,8	.46	11,8	.94	24,0

Standard color natural.

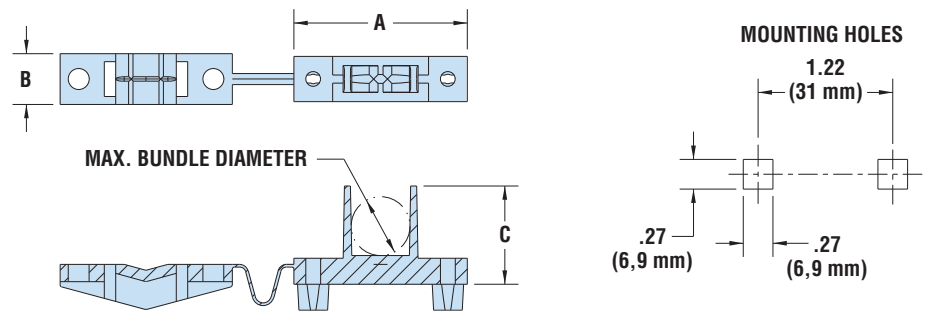

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)