



Heyco® SunWrap™ -Polyethylene

- **Easy to use: Just twist on wire!**
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13” (3,2 mm) to 7.00” (177,8 mm) diameters.
- For hose and cable **clamps**, see pages 7-30 through 7-35.


BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.13	3,2	1.50	38,1	8904	8905	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	8908	8909	CW 250 PE	.25	6,3	.38	9,5	.05	1,1
.31	7,9	3.00	76,2	8912	8913	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	8916	8917	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	8920	8921	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	8924	8925	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	8928	8929	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0

Standard colors UV black or natural.

* Parts are not UR recognized.

Material
Certifications
Conforms to:
Temperature Range


Polyethylene
Recognized under the Component Program of Underwriters' Laboratories File E173954
Fed Spec LP390, Mil I-631D, Mil P-21922B
-76°F (-60°C) to 190°F (88°C) - UL rated temp not to exceed 122°F (50°C)

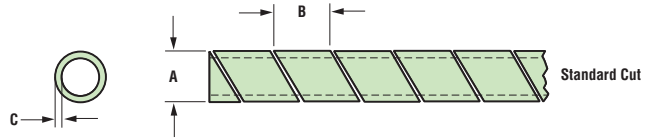

Heyco® SunWrap™ - Heavy Duty Cable Guard

- **Easy to use: Just twist on wire!**
- Designed to shield heavier cables and cable bundles; **extend cable life.**
- Available in a **variety of sizes** that fit cable and cable bundles from .75” (19.1 mm) to 6.00” (152.4 mm) in diameter.
- **Smooth finished interior wall.**
- **Highly flexible** for ease of movement.
- Packaged as one continuous piece, not spooled.
- May be **cut to desired length**, please consult Heyco.

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		Black			A Outside Dia.		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.75	19,1	1.50	38,1	8964		CWG 99 PE	.93	23,6	.95	24,1	.12	3,0
1.00	25,4	2.00	50,8	8966		CWG 126 PE	1.12	28,4	1.25	31,8	.13	3,3
1.25	31,8	2.50	63,5	8968		CWG 153 PE	1.37	34,8	1.35	34,3	.14	3,5
1.50	38,1	3.00	76,2	8970		CWG 181 PE	1.62	41,1	1.50	38,1	.15	3,9
2.00	50,8	3.50	88,9	8972		CWG 234 PE	2.09	53,1	1.60	40,6	.17	4,3
3.50	88,9	6.00	152,4	8974		CWG 401 PE	3.50	88,9	1.95	49,5	.25	6,4

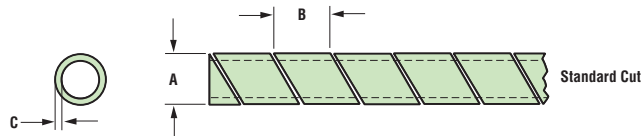

Quick Specs

Material: High Density Polyethylene
Flammability Rating: 94-HB
Temperature Range: 0°F (-18°C) to 165°F (74°C)