



Consult Heyco for Window Tints Other Than Clear



Heyco® Window “View Port” Plugs

Mounting Hole Diameter Range: .187” (4,7 mm) to 2.000” (50,8 mm)



- Molded of **transparent** polycarbonate for internal viewing or light transmission.
- Snap into mounting holes with fingertip pressure—no tools required.
- Multiple sizes for use in .187” (4,7 mm) to 2.000” (50,8 mm) diameter holes.
- Lock firmly into panel up to .125” (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062” (1,6 mm). Thickness may vary.
- **Available in a variety of tints –consult Heyco.**

| MOUNTING HOLE DIAMETER | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | |
|---|--------|-------------|-------------|-----------------|--------------------|-----|---------------------|
| in. | mm. | | | Clear* | A Head Diameter | | B Overall Height |
| | | | | in. | mm. | in. | mm. |
| Single Locking Step for Panel Thickness up to .062” (1,6 mm) | | | | | | | |
| .187 | 4,7 | 1300 | WP 187 | .25 | 6,4 | .23 | 5,9 |
| .250 | 6,4 | 1301 | WP 250 | .31 | 7,9 | .31 | 7,9 |
| .312 | 7,9 | 1302 | WP 312 | .38 | 9,5 | | |
| Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm) | | | | | | | |
| .375 | 9,5 | 1303 | WP 375 | .47 | 11,9 | .41 | 10,3 |
| .437 | 11,1 | 1304 | WP 437 | .53 | 13,5 | | |
| .500 | 12,7 | 1305 | WP 500 | .56 | 14,3 | | |
| .625 | 15,9 | 1307 | WP 625 | .73 | 18,6 | | |
| .760 | 19,3 | 1309 | WP 750 | .86 | 21,8 | | |
| .875 | 22,2 | 1311 | WP 875 | .95 | 24,2 | .45 | 11,5 |
| 1.000 | 25,4 | 1312 | WP 1000 | 1.13 | 28,6 | | |
| 1.093 - | 27,8 - | 1313 | WP 1093 | 1.22 | 30,9 | | |
| 1.125 | 28,6 | | | | | | |
| 1.375 | 34,9 | 1314 | WP 1375 | 1.50 | 38,1 | | |
| 1.500 | 38,1 | 1316 | WP 1500 | 1.62 | 41,2 | | |
| 1.750 | 44,5 | 1318 | WP 1750 | 1.88 | 47,6 | | |
| 2.000 | 50,8 | 1319 | WP 2000 | 2.16 | 54,8 | | |


*Consult Heyco for Window Plugs in tinted colors.

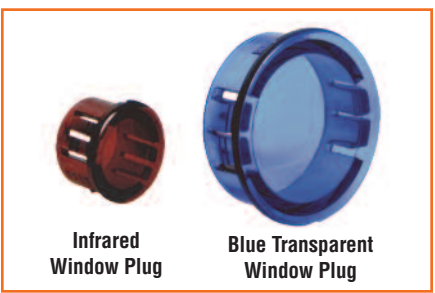

SINGLE PANEL THICKNESS DESIGN



MULTIPLE PANEL THICKNESS DESIGN



Quick Specs

| | |
|---------------------|--------------------------------|
| Material | Polycarbonate |
| Flammability Rating | 94V-2 |
| Temperature Range | -40°F (-40°C) to 239°F (115°C) |