



Heyco® -Tite Liquid Tight Cordgrips in Halogen Free V-0 Nylon

Straight-Thru, PG & Metric Hubs with Integral Sealing Ring
The Ultimate in Liquid Tight Strain Relief Protection



**NO O-RING
REQUIRED!**



CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum in.	Maximum in.	Minimum mm.	Maximum mm.				Black	A Clearance Hole Dia. in. mm.	B Max. O.A. Length in. mm.	C Thread Length in. mm.	D Wrenching Nut Thickness in. mm.		E Flat Size in. mm.			
PG Hubs																
.065	1,7	.210	5,3	V3444	RLTCG 7		.492	12,5	1.16	29,5	.32	8,1	.21	5,3	.63	16,0
.115	2,9	.250	6,4	V3207	LTCG 7	RA										
.065	1,7	.230	5,8	V3446	RLTCG 9		.599	15,2	1.25	31,8	.32	8,1	.21	5,3	.83	21,0
.105	2,7	.315	8,0	V3210	LTCG 9	RA										
.069	1,8	.260	6,6	V3448	RLTCG 11		.733	18,6	1.48	37,6	.38	9,7	.21	5,3	.94	23,9
.230	5,8	.400	10,2	V3213	LTCG 11	RA										
.095	2,4	.290	7,4	V4500	RLTCG 13.5		.804	20,4	1.53	38,9	.41	10,4	.21	5,3	.98	24,9
.170	4,3	.450	11,4	V3216	LTCG 13.5	UL										
.180	4,6	.400	10,2	V4502	RLTCG 16		.886	22,5	1.68	42,7	.44	11,2	.25	6,4	1.07	27,0
.270	6,9	.545	13,8	V3219	LTCG 16	UL										
.250	6,4	.490	12,4	V3454	RLTCG 21		1.115	28,3	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0
.435	11,1	.705	17,9	V3222	LTCG 21	UL										
.490	12,4	.785	19,9	V4504	RLTCG 29		1.470	37,3	2.23	56,6	.58	14,7	.30	7,6	1.73	43,9
.590	15,0	1.000	25,4	V3225	LTCG 29	UL										
Metric Hubs																
.065	1,7	.230	5,8	V4334	RLTCG M16		.630	16,0	1.25	31,8	.32	8,1	.21	5,3	.83	21,1
.105	2,7	.315	8,0	V4336	LTCG M16	RA										
.095	2,4	.290	7,4	V4338	RLTCG M20		.787	20,0	1.49	37,8	.41	10,4	.21	5,3	.98	24,9
.170	4,3	.450	11,4	V4340	LTCG M20	UL										
.250	6,4	.490	12,4	V4342	RLTCG M25		.985	25,0	1.89	48,0	.51	13,0	.26	6,6	1.30	33,0
.435	11,1	.705	17,9	V4344	LTCG M25	UL										
.490	12,4	.785	19,9	V4346	RLTCG M32		1.260	32,0	2.23	56,6	.57	14,5	.30	7,6	1.73	43,9
.590	15,0	1.000	25,4	V4348	LTCG M32	UL										

NEW!

Standard color black.

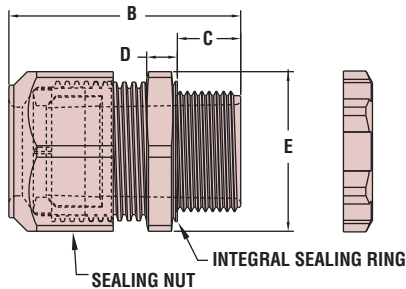

SUGGESTED CLEARANCE HOLE FOR NONTHREADED MOUNTING

- Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases. Also formulated for sunlight resistance.
- Integral Sealing ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for NEMA 4, 4X, 6 and 6P applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL).
- We recommend using the cordgrip with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED**
- For Nylon Locknut specifications, or to order nylon locknuts separately, see page 3-41.
- For Heyco Liquid Tight Threaded Plugs, see page 3-45.
- Consult Heyco for cordgrips molded in other colors.

Material	Nylon 6/6 Non-halogenated w/Buna N Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 RA Recognized under the Component Program of Underwriters' Laboratories File E51579 CS Certified by Canadian Standard Association File 93876C CEC Marks License #136681 (Metric parts only) CE Per EC Low Voltage Directive 73/23/EEC (Metric parts only)
Flammability Rating	Approved for NEMA 4, 4X, 6 and 6P Applications
Temperature Range	94V-0
IP Rating	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C) IP 68 (70 PSI, 5 BAR)



Quick Specs