




# Heyco-Flex™ II Liquid Tight Tubing

## Flexible, Nonmetallic Liquid Tight Electrical Conduit



TRADE SIZE	PART NO. Black	DESCRIPTION	PART DIMENSIONS				STANDARD COIL LENGTH ft/coil
			A Outside Diameter		B Inside Diameter		
			in.	mm.	in.	mm.	
1/4"	<b>8449</b>	HF2 1/4	.568	14,4	.395	10,0	100
3/8"	<b>8450</b>	HF2 3/8	.700	17,8	.494	12,5	100
1/2"	<b>8451</b>	HF2 1/2	.830	21,1	.632	16,1	100
3/4"	<b>8452</b>	HF2 3/4	1.040	26,4	.830	21,1	100
1"	<b>8453</b>	HF2 1	1.303	33,1	1.054	26,8	100
1-1/4"	<b>8454</b>	HF2 1-1/4	1.645	41,8	1.395	35,4	100
1-1/2"	<b>8455</b>	HF2 1-1/2	1.883	47,8	1.588	40,3	50
2"	<b>8456</b>	HF2 2	2.358	59,9	2.033	51,6	50

Standard Color: Black.  
Consult Heyco for "Cut to Length" Availability.

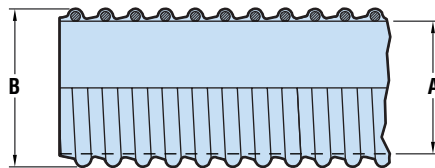

- 1/4" thru 2" trade sizes.
- Use with nylon Heyco-Flex Connectors: Snap-in, Straight or Sweep. See pages 0-18, 0-19, 0-20.
- May also be used with Heyco Die Cast Metal Fittings for Liquid Tight Tubing. See pages 0-23 or 0-24.
- Resists corrosion, oil, and water.
- Maximum flexibility; can be used in extremely tight quarters.
- Temperature rating 70°C (160°F).
- Smooth inside for easier wire pulling.
- Lightweight and lower installed cost.
- Quick installation; cuts with utility knife, PVC cutter or Heyco cutting tool (#8340).
- Integral rigid and flexible PVC construction.
- Ideal for fiber optic cable protection.
- Suitable for use in high vibration or flexing applications:
  - Automotive Equipment
  - Computers and Peripherals
  - Fiber Optics
  - Lab Equipment
  - Lasers
  - Office Equipment
  - Processing Control and Monitoring Equipment
  - Robotics
  - White Goods
- Passes submersion test of 70 psi.
- Mounting brackets are available, see page 0-27.
- **Order Part No. 8340**, VF-28 Cutting Tool, for cutting Heyco-Flex tubing and hoses cleanly and evenly. See page 0-15.

Material PVC  
 Certifications Recognized under the Component Program of Underwriters' Laboratories File #E-121095  
 Certified by Canadian Standards Association File #LL-84578  
 Flammability Rating VW1

Quick Specs